

POPULAR Computing WEEKLY

35p 11 November 1982 Vol 1 No 30

This Week

Vic20 software

Do you know enough to play *Mastermind*? Mike Grace looks at some of the latest offerings from Commodore for the unexpanded Vic20. See page 12.

Dragon owners

How does the Dragon compare with the ZX81? Simon Owen presents his conclusions, and a couple of Dragon pattern routines on page 26.

Tape Duplicating

The ins and outs of making software cassettes. David Kelly visits the Tape Duplicating Company to find out how cassettes are made. See page 10.

Spectrum programs

How to structure your programs — the key to writing good software. See page 24.

ZX81 radio log

A directory program that lets you keep an index of all your calls. See page 11.

News Desk



Tony Clarke, Dragon Data's Managing Director designate.

Dragon in forced sale by Mettoy

METTOY, the toy manufacturing giant, has been forced to sell its successful Dragon microcomputer development.

A six-partner consortium has contributed to create a new company, Dragon Data Ltd. The present managing director of Dragon, Tony Clarke, is retained as managing director designate.

Mettoy will continue to hold an 18.61 percent interest in Dragon Data.

In the last three years Mettoy has accumulated losses of more than £11.5m — resulting from the collapse of its toys business. Sale of Dragon — its one profitable subsidiary — is a bitter blow to the company's hopes of an early recovery.

Mettoy realises some £900,000 from the deal, which will go to offset losses in the first nine months of 1982 of over £2.5m.

See page 5

New games machine from Atari

ATARI has launched a new games machine in the US.

Called the Advanced Video Entertainment System (AVES), it was first shown as the Atari 5200 in Chicago in June.

The machine is a development of Atari's present VCS system with 16K Ram and improved graphics capabilities. It can also reproduce speech and a wide range of games sound effects.

Atari spokesman John Dean explained: "Each machine comes with two universal controllers — a combination of joystick, paddle and keyboard. They have 360° manoeuvrability and four firing buttons (two on each side)." The AVES features a pause facility, allowing the game in play to be halted and later resumed.

The machine is now on sale in America and has been launched with the full range of Atari software.

The AVES will be launched in the UK late in 1983. Price has yet to be decided.

Classified

Computer Swap 01-930 3266

Free readers entries to buy or sell a computer.
Ring 01-930 3266 and give us the details.

SPECTRUM 48K, £180. Tel: Wantage 67778.

ZX81 2K cassette player + five cassettes + three books. £55 ono. Tel: 061-790 7223.

VIC20, cassette deck, super expander, cartridge and joystick. £170. Tel: 0274 677667.

Classified

19K VIC20 + C2M unit, under guarantee, also one book. £230 ono. Tel: 0234-48394.

HEWLETT PACKARD, HP, 41C, printer, cardreader, wand, three-memory module, three applications module. £475. Tel: Bognor Regis 864021.

SHARP PC1500, colour printer-plotter, 8K Ram. £275. Tel: Bognor Regis 864021.

8K PET + intravel cassette deck, much software including many games. £200. Tel: 01-940 2077.

SINCLAIR ZX81, 16K with power supply, leads and box. £50. Tel: Brentwood 216757.

Classified

DRAGON 32 SOFTWARE

Cassette of Programs including Earth Defence, Bars, Cross Hatch, Tiles, Swapshop, Moira, Visibubbles, Circles, Carol, Spiral, Musical Keyboard, Photographic, Motoring Costs, Tacnogram, Reactance, Pools, Video and Index.

£4.95 inc p&p

VIDEO PRODUCTIONS, DEPT POC
11 FLORDON ROAD, NEWTON FLOTHMAN
NORWICH NR15 1DX

ZX81 + 16K + Fuller keyboard, books and cassettes. All for £75. L. Pancuk, 42 St Kilda Road, London W13.

PET 2001 8K, integral cassette and screen, with software, manuals, etc. £200. Tel: 01-542 4589 (eves).

Classified

SPECTRUM & SHARP MZ-80A MZ-80K SOFTWARE LIBRARY

Low cost weekly hire from only 50p. Comprehensive catalogue available FREE, covering games, languages and utilities. New titles are constantly being added. Send stamp for your catalogue now (please state machine).

TEL: KERNOW SOFTWARE LIBRARY
66 Elliot Drive, St Germans
Saffron, Cornwall PL12 8NL

ZX81 16K plus £30 software. £85 ono. Tel: 0284 64738 (eves/weekends).

Continued on page 28

WE GIVE YOU MORE—EVERY THURSDAY

A collection of vintage electronic devices. In the top left is a handheld calculator with a numeric keypad and a small display. To its right is a small computer terminal with a screen displaying a bar chart for the years 1978, 1979, and 1980. Below the calculator is a small, light-colored printer or terminal unit with a paper roll. In the foreground is a larger, more complex electronic device, possibly a desktop calculator or a small computer, featuring a keyboard and a small display screen.

We at Silica Shop are pleased to announce some fantastic reductions in the prices of the Atari 400/800 personal computers. We believe that the Atari at its new price will become the U.K.'s most popular personal computer and have therefore set up the Silica Users Club. This club already has a library of over 500 programs and with your purchase of a 400 or 800 computer we will give you the first 100 free of charge. There are also over 350 professionally written ten games and utility programs some are listed below. If you don't see the reply coupon and we'll send you full details. Alternatively give us a ring on 01-301 1111 or 01-309 1111.

ATARI 800
with 16K **£449**

applications, you can buy the Atari 400 + Disk Drive + Printer together with a selection of software packages. Silica Shop have put together a full catalogue and price list giving details of all the peripherals as well as the extensive range of software that is now available for the Atari 400/800. The Atari is now one of the best supported personal computers. Send NOW for Silica Shop's catalogue and price list as well as details on our users club.

ACCOMMODATIONS		Mountain Shores Pine Valley Sunny Flats Surrey Hills	OFFICES Calcutt Database Management Deason Master Dunlop Innovative Lover & Lovers Mort & Lums And Nelson Ludger Payroll Perforce Film Mgmt Pine Valley Sales Ledger Statistics I The Center of Tatistics I Viacore
ADVENTURE (INT)		Crack Crumpled Dragons Eye Invasion Iron Mountain Raccoon Star Wars The Ship Upper Rancor Watership 10	CRISTALIA Growth The Dream Fensleyland 2061 Gleatonic Growth Lands Of Miers Wesmore
ADVENTURE (INT)		Black Desert No 2 Pirate Adventure No 3 Mission No 4 Mission No 5 The Count No 6 Strategy No 7 Pyramind of D No 8 Ghost Town No 9 Star Island I No 10 Star Island 2 No 12 Golden Vey Angie Waters Carnegie Catastrophic Empires Catastrophe: Trader	
BOOKS		Book 1st Manual Computer Audit ADP Complete 86 DOS Complete 86 Operating De Rts Ar DOS Unlimited List DOS Unlimited List Mini-Arct Systems Open System, Listing	

EDUCATION
 B.S., A.S.
 Algebra
 Asian of Canada
 Cubbyholes
 Elementary Biology
 Fragments
 Mickey's Dictionary
 Int. Comp. Chem.
 Laminated
 Letterman
 Mammals

Music: Tac Toy
 Movie: 6 Frodo Baggins
 Museum
 Music: Terms/News
 Musical: Computer
 My First Alphabet
 Number: Blast
 Polycast
 Presidents of U.S.
 Quiz: Master
 Stereo: 10 Graphtics
 Three: A Match Day
 Video: Math Flash
 Wordmaster

EDUCATION
 from AT&T
 Come: French
 Come: German
 Come: Italian
 Come: Spanish
 Energy: Gas
 European: C & Capital
 Hangman
 Invite To Play: 1/2/3
 Kingdom
 Music: Composer

Sargen
 Stained & Capriote
 Touch Typing
ONLINE TRAINING
 British Heritage
 Critiques/Dominance
 Darts
 European Spine Jig
 Hectors Dictionary
 Hummery Dummies
 Jumble Jet Lander
 Snooker & Scrabble
 Submarine Command
 Super Cubes & Tilt
 Tournament Pool

INTERESTING FACTS
 from **APRIL**
 Adam & Eve
 Archibald
 Assassins
 Australasia
 Babes
 Blackjack Casino
 Stock Market
 Stock, Tim
 Sunrise Port

Castle
Cartoon
Chester King
Chinese Puzzle
Circusmaster
Cornyish Dialects
Disc Player
Dog Date
Domination
Dovehill
Eastern Front
Galosh & Holy Grail
Graphics/Sound
Jee-O
Jukebox
Lachrymose
Memory Match
Midst Touch
Minotaur
Outlaw/Horror
Preschool Quizzes
Pte. Bowling
Pushover
Raiders
Reversi II
Salmon Run
747 Landing Strut
Seven Card Stud

Shipyard Adventure
 Soldiers
 Space Chase
 Space Trek
 Starship Palace
 Tact Trek
 Terry
 Wizards Gold
 Wizards Revenge
INTERSTATE
IMMAYAL
 Asteroids
 Asteroids II
 Blackjack
 Conquest
 Chess
 Entertainment K/I
 Infinite Command
 Pit Men
 Space Invaders
 Star Raiders
 Super Breakout
 Video Exam
ONLINE SYSTEM
 Grand Prix
 Frogger

PERSONAL INT
 Arts & Crafts
 Arch Music System
 Banner Generator
 Blackjack Tutor
 Going To The Dogs
 Keyboard Organ
 Morse Code Tutor
 Personal Fitness Prog
 Piano Piano
 Starboard

PROGRAMMING
AIDS from Adam
Assembler (AS)
Assembler (APX)
Microsoft Basic
Pascal (APZ)
Pilot (Consumer)
Pilot (Educator)
Programming Kit

SANTA CRUZ
Amics of Animation
Bobs Business
Display Lists
Graphics Machine
Kids 1 & 2
Horizontal Scrolling
Master Memory Map
Mini Word Processor
Page Flipping
Player Music Qx
Player Piano
Sounds
Vertical Scrolling

SILICA CLUB
Over 600 programs
write for details

FOR FREE BROCHURES—TEL: 01-301 1111

I am interested in purchasing an Atari 400/800 computer and would like to receive copies of your brochures and test reports as well as your price list covering all of the available Hardware and Software:

Postcode

DEPT PCWK 11R2

SILICA SHOP

[illegible]

The Team

Editor

Brendon Gore

News Editor

David Kelly [01-930 3271]

Sub-editor

Ninette Sharp

Editorial Secretary

Theresa Lacy

Advertisement Manager

David Lake [01-839 2846]

Advertisement Executive

Alastair Macintosh [01-930 3840]

Managing Editor

Duncan Scot

Publishing Director

Jenny Ireland

Popular Computing Weekly,
Hobhouse Court, 19 Whitcomb Street,
London WC2
Telephone: 01-839 6835

Published by Sunshine Publications Ltd.

Typesetting, origination and printing by
Chesham Press, Chesham, Bucks

Distributed by S M Distribution
London SW9. 01-274 8611. Telex: 261643

© Sunshine Publications Ltd 1982

Subscriptions

You can have *Popular Computing Weekly* sent to your home: the subscription rate is £19.95 per year, for addresses in the UK, £37.40 overseas.

How to submit articles

Articles which are submitted for publication should not be more than 1,000 words long. The articles, and any accompanying programs, should be original. It is breaking the law of copyright to copy programs out of other magazines and submit them here — so please do not be tempted.

All submissions should be typed and a double space should be left between each line. Please leave wide margins.

Programs should, whenever possible, be computer printed.

We cannot guarantee to return every submitted article or program, so please keep a copy. If you want to have your program returned you must include a stamped, addressed envelope.

Accuracy

Popular Computing Weekly cannot accept any responsibility for any errors in programs we publish, although we will always try our best to make sure programs work.

This Week

News 5

Dragon sale, Commodore 64 delayed, BBC Forth, Torch modem.

Letters 7

Re-inventing the wheel, Wired for sound.

QSO 8

A utility program for the 16K ZX81.

Street Life 10

David Kelly talks to Neil Hooper of The Tape Duplication Company.



Reviews 12

Mike Grace looks at the latest Vic20 software.

Open Forum 14

Six pages of your programs.

Programming 23

More memory saving techniques on the ZX81 by John Dursi.

Spectrum 24

Structured programming by John Scriven.

Machine Code 25

The end is nigh.

Dragon 26

Simon Owen on the pros and cons of being a Dragon owner.

Peek & poke 27

Your questions answered.

Editorial

With Christmas fast approaching, many parents will be wondering what presents to buy for their children. Microcomputers are likely to figure prominently alongside the more traditional train sets, bicycles and toy soldiers.

Children are much more discriminating now than they were even 10 years ago. A micro on which they can play PacMan and Space Invaders is far more attractive than blow football or Monopoly, though it is also more expensive.

The boom in the micro market has to some extent coincided with a decline in the established toy making industry. Meccano is no more and a number of other toy manufacturers are struggling.

A few of the more far-sighted toy companies have already branched out into microcomputers and television games centres. Mettoy set up Dragon Data as a subsidiary and is already reaping the benefits. Mattel has launched its Intellivision system and Philips has a similar system on the stocks.

The result is likely to be a rise in micro sales in the run-up to Christmas. Equally important, software houses may find there is an increased demand for their programs.

Next Thursday

Can you escape from the Deneb system? How many starships can you destroy? Can you avoid blowing up the universe? Find out in *Star Fighter* — a new game for the unexpanded Vic20.

Also next week, Tim Langdell presents the first review of the *Computers Lynx* — a micro for both home and office.

Other features include our regular *Spectrum* and *Dragon* pages, our continuing series on machine code and an interview with Tony Clarke of *Dragon*.

Your local newsagent needs your support

Your local newsagent can keep a copy of *Popular Computing Weekly* for you. All you have to do is fill in the form below, cut it out and give it to your newsagent. Please reserve me a copy of *Popular Computing Weekly*.

Name _____

Address _____

Scramble for your Spectrum

High-speed arcade game
- easily the fastest available
Thrills, attitude, fire and
bomb controls
For 16K or 48K Spectrum

ONLY £8.50

from **MIKRO-GEN** the leaders
in ZX games



Plus Mikro-Gen games for your ZX81

Space Invaders ★ Breakout ★ Bomber ★ Frog
Paxman ★ Sorcerer's Castle ★ DeBug (Disassembler/Monitor)

All on cassette, with library case **ONLY £3.95 EACH**

Write for full details of the Mikro-Gen range of programs and add-ons,
available from local stockists or direct from the manufacturers' general mail
order department. (MIKRO-GEN is available to Mikro-Gen and add-on users & pricing)

Suppliers of Software to Sinclair

MIKRO-GEN

24 Agar Crescent Bracknell Berks RG12 2BA Tel: Bracknell (0344) 27317

ABERSOFT

7 MAESAFALLEN, BOW ST, DYFED, SY24 5BA

ZX81 & Spectrum Games

Chess 1.4: Ten levels m/c graphic screen display.

16K ZX81 £8.95

Invaders: Very fast m/c action. Includes mystery ship and increasingly difficult screens.

16K ZX81 £4.45

Mazeman: A fast action m/c game that reproduces the spirit of the original. The Spectrum version includes excellent graphics.

16K ZX81 £4.45 - Spectrum £4.95

Adventure 1: Based on the original game by Crowther, this game was the start of the Adventure craze. Reviewed Sinclair User, issue 2. Features Save game routine as the game can literally take months to complete.

16K ZX81 £8.95 - 48K Spectrum £9.95

We have full stock of all programs and supply by return of post (which is included in the price)

SOFTEK

48K 3D MAZEMENTURE: This fast machine code game is both a 3-D maze and adventure in one. Highly recommended and excellent value for only **£4.95**. (48K Spectrums only).

16K THE ZOLAN ADVENTURE: A full adventure in 16K, probably the best around - only **£4.95**.

NEW! COMPILER

**FOR 48K SPECTRUMS: £8.95
- WITH MANUAL -**

Ever wished you could wave a magic wand and turn your BASIC program into a machine code one? Now you can! (well almost). The Compiler allows you to write programs using up to 80% of Spectrum BASIC and then turns it into a machine code version in just seconds. Complete with explanatory manual by Tim Langdell!

WRITERS! why not let us market your software for any computer. We pay the highest royalties and market both from London and our office in Los Angeles.



Tim Langdell

Just out from Century/Personal Computer World and available from SOFTEK. Whether you are just beginning or have had some experience with computers, Tim Langdell's book is for you. It covers everything from an introduction to programming, through discussions of graphic art, education, business uses, and games writing to an introduction to machine code and hardware modifications. Packed with programs, routines and many hints and ideas.

Send your cheques or postal orders to
**SOFTEK, 329 Croxted Road, London
SE24.**

£4.95

Dragon grows on Prutec diet

SALE of the Dragon venture to a six-partner consortium will enable an ambitious development programme, planned for the machine, to continue.

In the deal, the new Dragon Data Ltd will receive £2.4m in equity and loan stock. Ownership of Dragon Data is split as follows: Prutec (40.74 percent), the Welsh Development

Agency (22.12 percent), Mettoy (18.61 percent), National Water Council, Fountain Development Capital Fund and F & C Enterprise Trust (16.53 percent) and Dragon directors (2 percent).

The company plans to produce more than 200,000 microcomputers in 1983 and the cash will be used to fund the necessary expansion. It was this growth that Mettoy could not afford to undertake that prompted the sale.

Dragon will now be moving from the Mettoy factory in Swansea to premises provided by the Welsh Development Agency, possibly near Port Talbot. Within the next few months the number of staff employed by Dragon — currently 60 — will double.

Tony Clark, Dragon's managing director, sees a rosy future for the company. "Dragon has had a very substantial influx of cash and we shall be taking a great deal of manufacturing and distribution skills with us from Mettoy."

At present the printed-circuit boards for the Dragon 32 microcomputer are assembled by Race Electronics in Llantrisant. Manufacture of

the cases, assembly of the boards and cases, and quality control are all performed by Mettoy.

Mettoy will continue to manufacture the plastic mouldings for the machine, but final assembly and testing will now be carried out by Dragon Data.

Tony Clarke commented: "By the middle of next year Dragon hopes to be able to assemble 50 percent of the printed-circuit boards. Mettoy will continue to carry out subcontract work for us in the foreseeable future — providing their price is right."

The new line-up at the top of Dragon Data will be: Tony Clarke (Managing Director), Richard Wadman (Sales and Marketing Director), Derek Williams (Technical Director) and Morris Wilde (Manufacturing and Engineering Director).

Following the sale, Mettoy, which employs more than 2,000 workers, must consolidate its traditional toy interests in an effort to reduce its continuing heavy losses. Mettoy retains an option to buy back up to 35 percent share of Dragon in 1984-85.



Sinclair in vouchers mix-up

CONFUSION has arisen over the £10 discount vouchers being given away by Sinclair Research to purchasers of the Spectrum microcomputer.

Customers who have ordered more than one machine in the same order have complained that they have received only one voucher.

Jaeserv, Sinclair's mail-order company, confirmed this policy. Their supervisor commented: "If more than one machine is going to the same address, then the customer will only receive one voucher."

A spokesman for Sinclair Research explained "The order processing computer generates one voucher per order. If a customer who ordered more than one machine comes back to us — either by telephone or letter — we will send out the balance of the vouchers."

"There is absolutely no intention to deceive," he added.

Rumbelows' aggressive marketing

RUMBELOW'S normally sell the Commodore Vic20 microcomputer for £169.99.

But as a special offer they are now selling the machine at £139.99 — providing you part-exchange your old Sinclair computer or tv game. As they say in the advertisement: "What more could you expect from Rumbelows?"



MELBOURNE HOUSE has tied up a deal with the Tolkien Estate to produce an adventure game for the 48K Spectrum featuring characters from the book "The Hobbit".

The planned package will include a copy of the book and will go on sale in December.

Vic rallies as 64 launch falters

LAUNCH of the Commodore 64 microcomputer has been delayed.

It now looks as if the 64 will not go on sale in the UK until at least the middle of December and possibly not until spring next year.

The Vic20 will not now be withdrawn, as originally planned, and will continue to be sold in the UK in 1983.

More than 1m Vic20s have now been sold worldwide — 800,000 to the US. Jack Tramiel predicts that Commodore will sell a further 400,000 Vics in America before Christmas.

Still waiting, but listening

In the past, ringing Sinclair's mail-order company in Camberley has rarely been a pleasurable experience.

All that has now changed. A machine has now been installed which plays you music while waiting for your enquiry to be dealt with.

Among the tunes on offer are Ray Charles singing "I Can't Stop Loving You" and Stevie Wonder singing "Sunshine of My Life".

5th ZX Microfair

DECEMBER 18 will see the Fifth ZX Microfair, held once again at the New Horticultural Hall, Greycoat Street, London.

The show will be open from 10 am to 5 pm. For further details contact Mike Johnston, 71 Park Lane, Tottenham, London N17.

Taking a horizontal view

FOR those who find the 32-character width of the ZX Printer restricting, there is now a solution.

Using the software developed by Crommax, it is possible to print lengthways down the ZX Printer paper —

rather than widthways. Up to 32 lines can be printed, of whatever length defined by the user.

The program — ZX Lprint — is available on cassette, price £3.95 from Crommax, 25 Favart Road, London SW6.

BBC goes Forth

LEVEL 9 Computing has announced a version of Forth for the BBC Models A and B microcomputers.

The rq Forth compiler is supplied on cassette complete with a 70-page manual. A full screen editor is included and 260 primary commands are provided. Further functions can — as is usual with Forth — be easily defined.

The cassette costs £15 and is available from Level 9 Computing, 229 Hughenden Road, High Wycombe, Bucks.

Torch modem approved

TORCH Computers has obtained permission from British Telecom to connect its modem unit to the telephone network.

Based around circuit boards manufactured by Acorn, the Torch computer now becomes the first machine to gain such approval.

Further information is available from Torch Computers, Abberley House, Great Shelford, Cambridge.



THE ADVENTURE GAME THAT'S FOR REAL !!!

£6,000 PRIZE! FREE HIT SINGLE! 48K ZX SPECTRUM

(16K ZX81 VERSION NOW AVAILABLE)

Will you be the first to locate the Golden Statue of Pi in time and space, and be rewarded with the original? Exclusively crafted by the winner of the De Beers Diamond International Award, from gold, diamonds and the most precious of the earth's riches.

PIMANIA, where smartphones turn into hangliders, where music means madness and where the Pi Man rules supreme! He's tall with you, he's behind you, he'll betray you, he'll even do the Hickey Micky! Amusing cartoon graphics! Full musical score! Spectacular colour and sound effects! Includes the hit single "Pi Man", with vocals by Clive Souter and the Pi Man!

It could take you a week to play, it could take you a lifetime! PIMANIA, the new adventure that computer gaming has come up with... an adventure enthusiast's dream! (Computer & Video Games)

An investment at £10 (48K Spectrum) £8 (16K ZX81)



Automata Ltd. (POW)
65a Osborne Road
Bournemouth PO5 3LR
England

PLYMOUTH COMPUTERS

83 EXETER STREET, PLYMOUTH
DEVON PL6 5ZD 0752 23042

STAR BARGAINS!!!

- ☆ EPSON MX80 FT111 PRINTER £356.50
- ☆ DRAGON 32 £189.50
- ☆ MZ80A DUSTCOVER £6.90
- ☆ DRAGON 32 DUSTCOVER £4.90
- ☆ EPSON MX80 DUSTCOVER £4.90

DUSTCOVERS ARE BUFF — PVC FINISHED — QUALITY

NO HIDDEN EXTRAS IN OUR PRICES
ALL INCLUDE VAT AND CARRIAGE

MZ80A CHRISTMAS BUYERS
RING NOW FOR BEST PRICE

ACCESS • VISA • DINERS • AMEX • CHEQUES • POSTAL ORDERS

PLYMOUTH COMPUTERS

83 EXETER STREET, PLYMOUTH
DEVON PL6 5ZD 0752 23042

SPECTRUM ARCADE PACK

CITY Bomber, Polecat, Breakout,
Subhunt, Crazy Race, Fruit Machine,
Missile Commander, and Lunar Landing. £5.00



8 Brilliant Games for only £5.00, incl. p&p

Available now in good computer shops,
and mail order from

ARCADE AGE

184 Market Street, Hyde, Cheshire

ELKAN ELECTRONICS

Make the most of your pocket computer

- new books for DRAGON 32
- 101 program tips & tricks £6.95
- 55 programs home/school/office £6.95
- color computer graphics £7.95
- Add 50p per book post & packing (max. £1.50)
- new software for SHARP PC1500
- World Exclusive! NEW Business Programs
- from GEMINI! Silicon Notebook £19.95
- Executive Suite (6 programs) £29.95
- New Idea Ideal Gift

At last - no more tape-loading problems!
SHARP PC152 cassette tape recorder
purpose built for computers only £39.93

Send cash, cheque, Access or Visa Card No. Ask for our
New FREE pocket brochure. Trade enquiries welcome anytime.

ELKAN ELECTRONICS (Dept. POP)

FREEPOST, 28 Bury New Road, Prestwich, Manchester M25 6LZ or telephone
061-798-7613 (24 hr. service). See full list on Prestel 258-2022.

We specialise in pockets!

LETTERS

Exchange and Mart

I wonder if any of your readers can help me to obtain a copy of *Popular Computing Weekly*, July 1, as I need this to complete my collection of your magazine.

In exchange I can offer a number of my own "video art" programs for the Vic20 with Super expander cartridge.

Cpl D P Morgan
24269328
3 Squadron
9 Signal Regiment
BFPO 58

Customer complaints

About two weeks ago I wrote to you, enclosing a copy of a letter I had sent to Clive Sinclair. In the letter I complained about the ridiculously long delivery wait for the 48K Spectrum together with the constant misrepresentation by Sinclair about the clearance of the backlog. It is now 16 weeks since my order was acknowledged (which in turn was a further two weeks since it was received). When I rang Sinclair yesterday I was given for the umpteenth time "about another three weeks".

It is therefore disappointing to find that once again you have fallen into the trap of helping to give credence to Sinclair's FALSE propaganda. You reported on page 5 of your September 30 issue the claim that the backlog would be cleared by the middle of October. "About three weeks" means, in Sinclair Language, that they really have no idea when delivery will take place. Even if it was three weeks, this would still take it to after the middle of October.

When you consider that my order was placed at the end of May (and there must be hundreds in the waiting list behind me), it is evident that there was never even the remotest possibility that the whole backlog would be cleared by the middle of October. While I appreciate that you print in good faith information received by you, it must surely be obvious to you by now that Sinclair's utterances are merely intended to mislead people instead of giving the true position. By continuing to regular-

ly propagate them, you are yourself in danger of alienating a small proportion of your readership.

Michael Hodgkins
3 Rimsdale Walk
Ladybridge
Bolton
Lancashire BL3 4TT

Despite your unfortunate experience, and those of other frustrated Spectrum buyers, I do not think Sinclair's utterances are deliberately intended to mislead people. Sinclair has found itself in its current mess by promising a product which it subsequently found it could not deliver within the stated 28 days.

There are a number of reasons why Sinclair is unable to deliver the Spectrum on schedule, mainly technical. Since the beginning, we have reported on the problems Sinclair has had with quality control, the additional 32K Ram and most recently the redesign of the Spectrum's printed circuit board.

Sinclair has issued a number of statements on delivery times for the Spectrum. Unfortunately, further production problems have meant further delays.

Sinclair is aware of the damage these delays are causing to his reputation, and the fact that he is losing customers to competing manufacturers.

If it is any consolation, the backlog for 16K machines does seem to be shortening. It is largely the 48K customers who are reporting horror story delays of 16, 17 and even 19 weeks.

And he pulled out a plum

Nigel Searle says that Sinclair has tried to respond with letters to aggrieved customers but that it was very difficult.

Rubbish!
Further, Sinclair has spent an absolute fortune in customer service.

Spherical objects!
Facts: Since ordering a 48K Spectrum in May, by Teledata, I have received only two letters from the company. Neither letter was at all reassuring, helpful or informative and the postal charge, 31 pence, is hardly a fortune. Now, some 4½ months later, I still await delivery of the machine despite

numerous telephone calls to Camberley.

Small wonder, then, that I am inclined to get annoyed by talk of the delays being over, of the backlog being cleared, of excuses like "we didn't think", factory holidays, minor production problems. Small wonder, then, that Trading Standards Offices up and down the country have Sinclair on their complaints files, that the Advertising Standards Authority is investigating, that other consumer interests, including the Office of Fair Trading, are becoming involved.

Sinclair may be a "technology driven company". However, if the company is to remain in business it needs to considerably improve its flagging public image, to improve its appalling customer service record, both for new sales and for repairs of faults.

Mr Sinclair, I suggest, needs to pull his finger out!

Gerry Luff
19 Charlock Way
Burmham
Guildford
Surrey GU1 1YB

Amplifying Spectrum

I have discovered a very simple method of amplifying the sound output from the ZX Spectrum. All you need is your tape recorder and cassette leads, no expensive additions are required. Simply plug in the microphone lead and disconnect the earphone lead, then remove the tape from the recorder and press the play button. All the sounds made by the Spectrum's internal speaker will now be echoed at the recorder's speaker and you can adjust the volume and tone controls. There is some background noise caused by the recorder itself, but what do you want for nothing? I use a Prinz TR 225 recorder.

On a different subject, you announced in the October 14 edition of *Popular Computing Weekly* that Prism are building a new range of software for the ZX81. Could you please tell me how to get in touch with them?

A Laird
9 Franklin Road
Saltcoats
Ayrshire KA21 5AT

Prism Microproducts is based at 30-31 Islington Green, London

N1 8BJ (Telephone 01-359 7481).

Antipodean's pleasure

Came across your magazine while browsing about the local newsgagent.

Being the owner of a ZX81 (with 16K memopak) I promptly purchased the magazine, went home and thrashed into the programs there-in.

What joy to see so many goodies aimed at the ZX81 computer. Most software available here is aimed at the "other mobs".

I have ordered all the back issues, and will continue to collect the future ones. Keep up the excellent standard won't you?

PS. Letters from readers would be welcome.

Kevin Thomas
11 Joan Avenue
Glengowrie
South Australia 5044

Reinventing the wheel

In the correspondence with W. McLaren and his cube root program, you are reinventing the wheel. Uncle Clive has given us a direct routine for cube or any other roots. Just swot up on the laws of indices and use "to the power of" key (shift H).

10 INPUT Y
20 PRINT Y**(1/3)
30 GOTO 10

The general statement is $Y^{**}(1/n)$ which will give the nth root of Y.

$Y^{**}-n$ will give you the reciprocal of Y^n or $\frac{1}{Y^n}$

$Y^{**}(-1/n)$ will give the reciprocal of $n\sqrt[n]{Y}$ or $\frac{1}{n\sqrt[n]{Y}}$

This facility will also confirm the truth of the statement $Y^0 = 1$, a result which could be disconcerting in the middle of an equation and may prompt some users to complain about a faulty Rom.

Les Parselle
Llechryd
Cardigan
Dyfed
SA43 2NR

If you have an opinion you want to express, or have spotted an error that needs correcting, write to: Letters, *Popular Computing Weekly*, Hobhouse Court, 19 Whitcomb Street, London WC2.

Radio Log

A directory program for 16K ZX81 by Anthony Briggs

One of the requirements of the amateur transmitting licence is that you should keep a permanent written log of all radio contacts, complete with dates, times, call-signs, wavelengths, etc.

Many amateurs, however, keep in addition, a separate card index of contacts so they can tell quickly if a contact is a fresh one. QSO was designed as a computer 'card index' which would allow me:

- (i) Check to see if a call-sign was already logged.
- (ii) Enter it if necessary with appropriate details, name, town, latest date of contact and other information.
- (iii) Modify entries as necessary.
- (iv) Enter a 'backlog' of call-signs at one go.
- (v) Print a sorted list of all entries.


QSO is designed for 150 entries, but the only limitation on this, and the size of the entries, is the memory available.

To enter, type in the program as listed. Run is to set dimensions. When the menu appears, type in 'L'. This is the 'hidden' code which lists the program when you wish to break it. Now, delete lines up to, but not including 100.

To use the program type in *Goto 100*.

The program can be Saved from the menu, complete with entries and will Run automatically on Loading.

NB. Although QSO is designed for radio enthusiasts, it can easily be adapted for anyone who wants an index program.

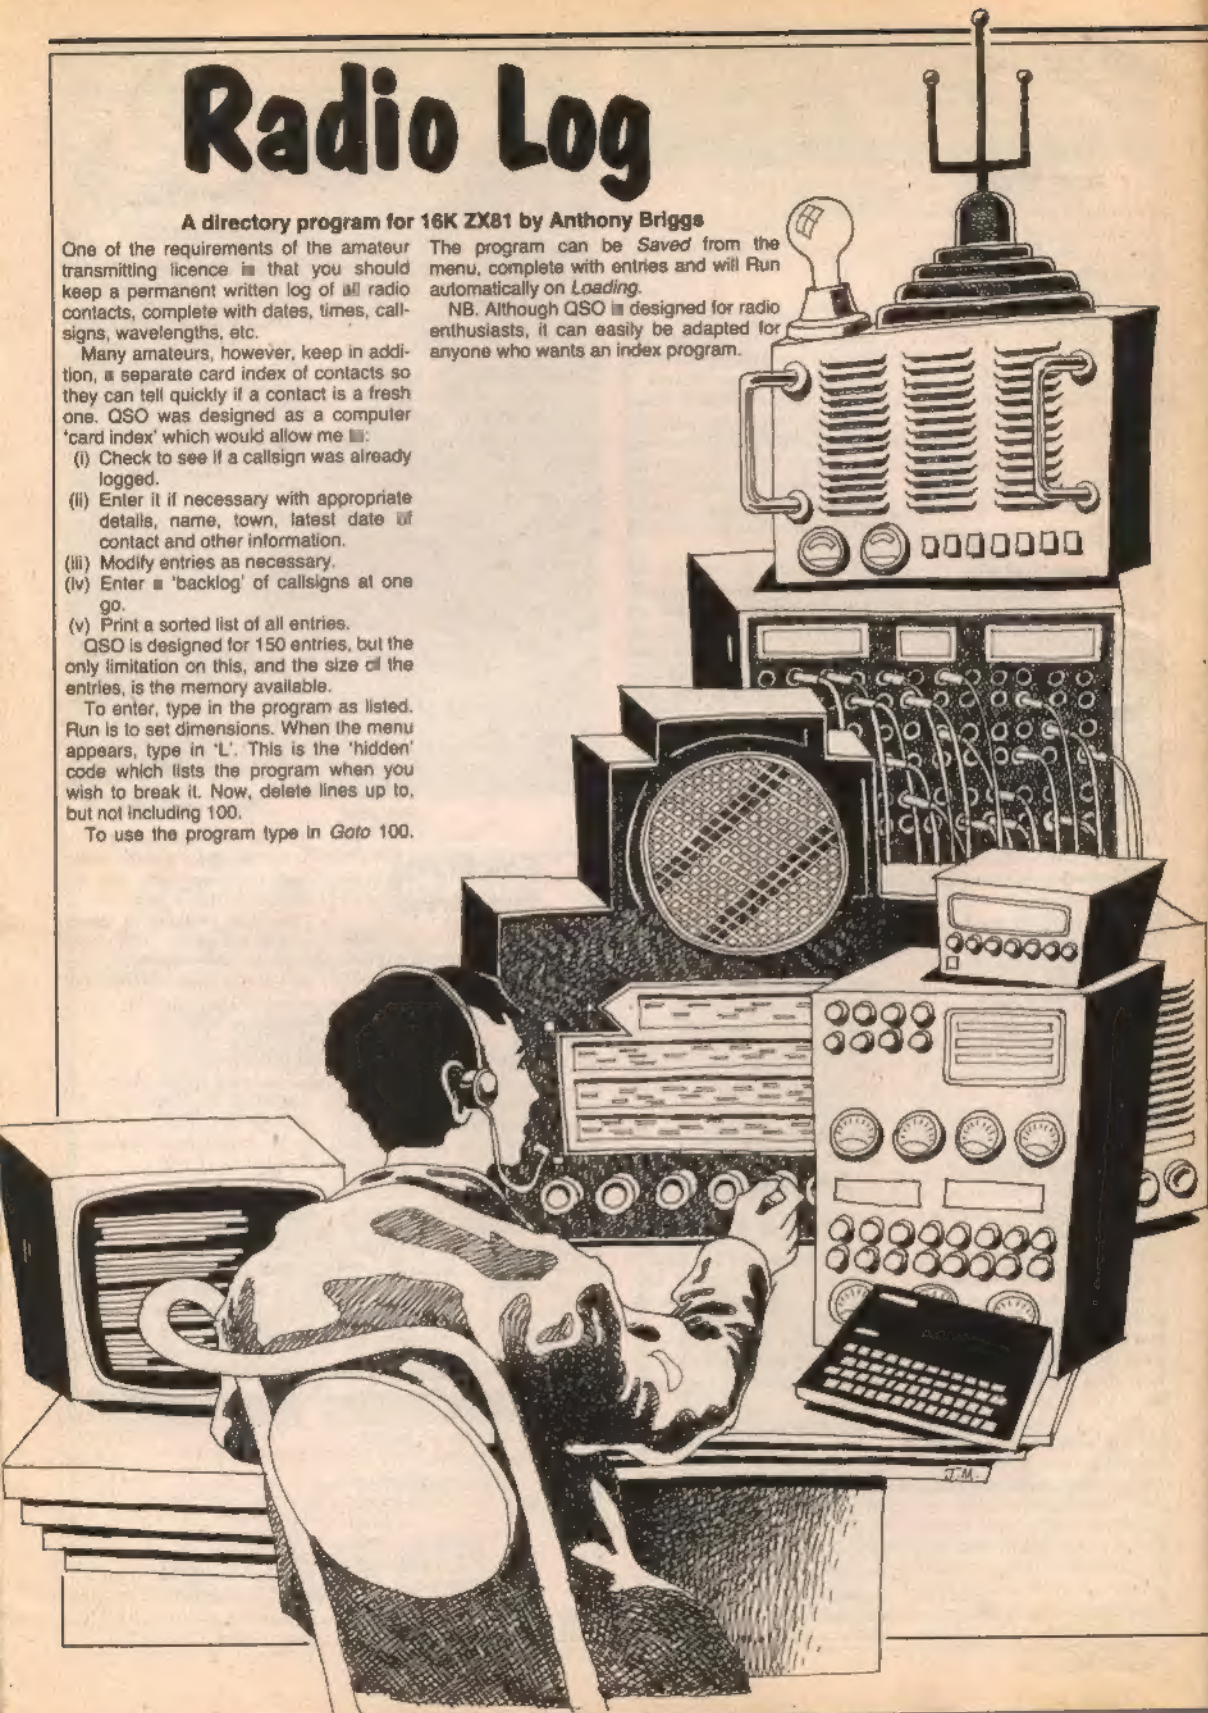


```

1 REM *****
2 REM 0.5.0.
3 REM COPYRIGHT A.E. BRIGGS 82
4 REM *****
10 LET A=1
20 LET E=1
30 LET S=150
40 LET C=1
50 DIM A$(10,9)
60 DIM C$(8,15)
70 DIM D$(8,5)
80 DIM E$(5,25)
100 PRINT AT 5,12;"0.5.0."
110 PRINT AT 7,12;"*****"
120 PRINT
130 PRINT "TO CHECK A NEW CALLS
IGN INPUT "C"
140 PRINT
150 PRINT "TO ADD SEVERAL CALLS
IGN INPUT "A"
160 PRINT
170 PRINT "TO SAVE PRESS "5"
180 PRINT
190 PRINT
200 PRINT "TO PRINT SORTED LIST
INPUT "P"
210 INPUT J$
220 CLS
230 IF J$="C" THEN GOTO 450
240 IF J$="A" THEN GOTO 250
250 IF J$="3" THEN GOTO 1000
260 IF J$="L" THEN LIST
270 IF J$="P" THEN GOTO 2000
280 GOTO 100
290 LET A=C
300 PRINT AT 11,2;"INPUT CALLS I
GN IN THE FORM: SUB
XYZM"
310 INPUT A$(A)
320 CLS
330 GOSUB 1000
340 LET A=A+1
350 LET C=A
360 PRINT "IF YOU HAVE MORE ENT
RIES INPUT "M"
370 PRINT
380 PRINT "TO RETURN TO MENU PR
ESS "A"
390 INPUT K$
400 CLS
410 IF K$="M" THEN GOTO 300
420 IF K$="L" THEN GOTO 100
430 IF K$="M" THEN LIST
440 GOTO 300
450 PRINT AT 8,2;"ENTER CALLS I
G FOLLOWED BY "NEU
LINE"
460 PRINT AT 15,2;"TO RETURN TO
MENU PRESS "M"
470 INPUT P$
480 CLS
490 IF P$="M" THEN GOTO 100
500 IF P$="L" THEN LIST
510 REM *****
520 REM TO CHECK CALLS IGS
530 REM *****
540 LET D=LEN P$
550 CLS
560 FOR A=1 TO C
570 FOR B=1 TO D: THEN GO
TO 700
580 NEXT A
590 FOR A=1 TO C
600 IF NOT P$(A) (1 TO D) THE
N GOTO 620
610 NEXT A
620 PRINT AT 11,0;"THIS IS A NE
W CALLS I - SMALL I ENTER I
T INTO MEMORY ? (YES/NO)"
630 INPUT G$
640 CLS
650 IF G$="NO" THEN GOTO 450
660 IF G$="YES" THEN GOSUB 1000
670 PRINT
680 PRINT "PRESS "NEULIN
E"
690 INPUT I$
700 IF I$="M" THEN GOTO 720
710 LET A=A+1
720 LET C=A
730 LET A$=""
740 CLS
750 GOTO 450
760 PRINT AT 5,0;A$(A)
770 PRINT
780 PRINT "NAME: ";B$(A)
790 PRINT
800 PRINT "TOWN: ";C$(A)
810 PRINT
820 PRINT "LAST DATE OF CONTACT
";D$(A)
830 PRINT
840 INPUT E$(A)
850 CLS
860 PAUSE 300
870 PRINT
880 PRINT "DO YOU WANT TO CHA
NGE THIS ENTRY ? (YES/NO)
890 INPUT M$
900 IF M$="NO" THEN GOTO 920
910 IF M$="YES" THEN GOTO 970
920 GOTO 850
930 CLS
940 GOTO 450
950 REM *****
960 REM TO CHANGE ENTRIES
970 REM *****
980 LET M$=""
990 INPUT NEW VERS
ION NOW IF YOU WISH TO CHANG
E
1000 LET N$="INPUT "0" IF YOU
DO NOT WISH TO CHANGE"
1010 LET O$="CALL SIGN"
1020 LET P$="NAME"
1030 LET Q$="TOWN"
1040 LET R$="DATE"
1050 LET S$="ADDITIONAL INFORMA
TION"
1060 CLS
1070 PRINT A$(A)
1080 PRINT
1090 PRINT M$:O$
1100 PRINT M$:P$
1110 INPUT T$
1120 CLS
1130 IF T$="0" THEN GOTO 1150
1140 IF NOT T$="0" THEN LET A$(A
)=T$
1150 PRINT B$(A)
1160 PRINT
1170 PRINT M$:P$
1180 PRINT M$:Q$
1190 PRINT M$:R$
1200 INPUT U$
1210 CLS
1220 IF U$="0" THEN GOTO 1250
1230 IF NOT U$="0" THEN LET B$(A
)=U$
1240 PRINT C$(A)
1250 PRINT
1260 PRINT M$:O$
1270 PRINT M$:P$
1280 PRINT
1290 PRINT M$:Q$
1300 INPUT V$
1310 CLS
1320 IF V$="0" THEN GOTO 1350
1330 IF NOT V$="0" THEN LET C$(A
)=V$
1340 PRINT D$(A)
1350 PRINT
1360 PRINT M$:P$
1370 PRINT M$:Q$
1380 PRINT M$:R$
1390 INPUT W$
1400 CLS
1410 IF W$="0" THEN GOTO 1430
1420 IF NOT W$="0" THEN LET D$(A
)=W$
1430 PRINT E$(A)
1440 PRINT
1450 PRINT M$:S$
1460 PRINT
1470 PRINT M$:Q$
1480 PRINT
1490 PRINT M$:R$
1500 PRINT M$:S$
1510 INPUT X$
1520 IF X$="0" THEN GOTO 1540
1530 IF NOT X$="0" THEN LET E$(A
)=X$
1540 CLS
1550 GOSUB 1040
1560 PRINT "PRESS "NEULINE" UN
LESS YOU HAVE FINISHED WITH T
HIS ENTRY"
1570 INPUT L$
1580 CLS
1590 IF L$="" THEN GOTO 450
1600 REM *****
1610 REM TO MAKE ENTRIES
1620 REM *****
1630 LET A=C
1640 LET A$(A)=F$
1650 PRINT A$(A)
1660 PRINT
1670 PRINT "INPUT NAME (UP TO 10
LETTERS)"
1680 INPUT B$(A)
1690 CLS
1700 PRINT B$(A)
1710 PRINT
1720 PRINT "INPUT TOWN (UP TO 15
LETTERS)"
1730 INPUT C$(A)
1740 CLS
1750 PRINT C$(A)
1760 PRINT
1770 PRINT "INPUT DATE OF Contac
T IN THE FORM: 01/09/82"
1780 INPUT D$(A)
1790 CLS
1800 PRINT D$(A)
1810 PRINT
1820 PRINT "INPUT ANY ADDITIONAL
INFORMATION (UP TO 25 LETTERS)"
1830 INPUT E$(A)
1840 CLS
1850 PRINT A$(A)
1860 PRINT
1870 PRINT B$(A)
1880 PRINT
1890 PRINT C$(A)
1900 PRINT
1910 PRINT D$(A)
1920 PRINT
1930 PRINT E$(A)
1940 RETURN
1950 PAUSE 200
1960 CLS
1970 GOTO 100
1980 SAVE "0.5.0"
1990 GOTO 100
2000 REM *****
2010 REM NETZNER SORT
2020 REM *****
2030 LET F$=""
2040 LET G$=""
2050 IF A$(F) (0) THEN GOTO 2000
2060 LET F$=F$+1
2070 GOTO 2000
2080 LET H$=A$(F-1)
2090 LET I$=INT (H/2)
2100 IF H=0 THEN GOTO 2370
2110 LET I$=H
2120 LET J$=H
2130 LET K$=I
2140 LET L$=J
2150 IF A$(F) (K) THEN GOTO 22
2160
2170 LET J$=J+1
2180 IF J>I THEN GOTO 2100
2190 GOTO 2000
2200 LET A$(F)=A$(K)
2210 LET A$(K)=A$(J)
2220 LET A$(J)=A$(F)
2230 LET A$(F)=A$(K)
2240 LET A$(K)=A$(J)
2250 LET A$(J)=A$(F)
2260 LET A$(F)=A$(K)
2270 LET A$(K)=A$(J)
2280 LET A$(J)=A$(F)
2290 LET A$(F)=A$(K)
2300 LET A$(K)=A$(J)
2310 LET A$(J)=A$(F)
2320 LET A$(F)=A$(K)
2330 LET A$(K)=A$(J)
2340 LET A$(J)=A$(F)
2350 LET A$(F)=A$(K)
2360 IF F<1 THEN GOTO 2100
2370 SLOW
2380 REM *****
2390 REM PRINT SORTED LIST
2400 REM *****
2410 FOR N=1 TO C
2420 PRINT A$(N)
2430 NEXT N
2440 PRINT
2450 PRINT
2460 PRINT "TO RETURN TO MENU PR
ESS "M"
2470 INPUT Z$
2480 IF Z$="M" THEN GOTO 2500
2490 GOTO 2470
2500 CLS
2510 GOTO 100

```




Neil Hooper with his array of signal processing machines.

From the Bachelors to Bug-Byte and Bach

David Kelly talks to Neil Hooper of the Tape Duplicating Company

Every prospective software company has come up against this problem at some time or another. You have just written the best computer program on the planet. Now what do you do with it?

If you want to sell it, it will need to be copied. There are surprisingly few companies that have the facilities to produce large quantities of computer cassettes — one of these is the Tape Duplicating Company, based in Islington, London. They handle work for many of the major companies and November will see them produce close on 100,000 software cassettes.

Yet, it is only by a series of happy accidents that they have come to be involved in this type of work at all.

Neil Hooper runs their computer division. After leaving school he joined Barclays Bank. Posted to Cross Keys in South Wales he soon became restive. Moving jobs, he worked first as a disc jockey at Tiffany's in Rotherham and then as a writer for the IPC *Melody Maker* spin-off *Musicians Only*. This job only lasted 18 months before the publication folded, and he found himself without work.

Neil lived quite close to Tape Duplicating. He just wandered in one day and they offered him a job on the strength of his knowledge of the music-business.

At this time Tape Duplicating did no computer work. That side of things started in November 1981. Explains Neil: "John Patterson of Silversoft just came in off the street and said 'Do you copy microcomputer cassettes — I found you in yellow pages.'"

"My first reaction was enthusiastic. It was just luck. I was, at that time, the only person in the company who was a micro-

computer enthusiast. A friend on *Musicians Only* had introduced me to his Tandy Level 1, and ever since then I had been hooked. I told John that we'd have a go."

At this point there were no ground rules for duplicating software cassettes. Up until then the UK home computer market had been a cottage industry.

"The ZX81 was our entry," says Neil. "People we talked to said if you could get less than a 25 percent rejection rate then



Cutting out and loading.

you were doing well. This horrified me. I thought 'If we can't do better than that then we don't want to know.'"

Neil agreed to do some trials with the tapes supplied by Silversoft and the results were encouraging. This was in November in the height of the audio season and everything was jumping for Christmas 1981. So any further plans were shelved until the New Year. In January the company bought a ZX81 and a Ram pack.

"When we looked at whether we wanted to get into computer tape duplication we discovered that we were ideally set up to do it," says Neil. "We had the right equipment — purely by chance. With very little adjustment we could improve our

tolerances to the necessary levels. If we hadn't been able to do it so easily I don't suppose we would have got into it — now is not the right time to start a huge investment in machinery — particularly then, for a market which at that time did not even exist.

"These days we do quite a lot of signal processing to ensure the quality of our recordings, and our record is pretty well perfect. Now that the market is increasingly retail orientated, our customers have to be sure we will do a good job because quite often the tapes go straight into distribution after leaving our factory.

"We do work for most of the well-known companies, 51 in total — including Quicksilver, Bug-Byte, Commodore, Sinclair and Grundy. So far we have done 226 cassette programs, of all types — games, business packages and utilities. But we had another four masters in this morning. The equipment we have means we can cope with programs for the ZX81, Spectrum, Vic20, Dragon, NewBrain, Commodore 64, Tandy, Sharp and almost anything else. We can do the Atari, but it is a small market since most of the software is ROM based."

Tapes are copied end-to-end, recorded many times on reels of cassette tape over 1½ miles long. The recorded reel is then cut into the cassette cases after recording. This is better than in-cassette copying, where recording takes place after the tape has been loaded into the cases. The recording takes place at many times the normal playing speed and in-cassette copying is of inferior quality because the cassettes are not designed to operate smoothly at high speeds.

Computer tape duplicating brings its own special problems. But it does have the advantage that the frequency range of the computer signal is in a narrow region — up to 3 or 4 KHz (a typical audio signal could be as high as 16KHz.) A disadvantage is that the tape quality has to be high. Tape drop-out — small imperfections in the magnetic coating of the tape — which would be tolerable on an audio cassette, are unacceptable on a computer tape.

The duplicating process has nine steps: (1) Signal processing. The computer program is dumped from the tape supplied by the software house on to ¼" tape.

At this stage the signal is processed so that, after duplicating, the wave-form will be suitable to allow easy loading of the program. Domestic recorders are often badly aligned, so the loading process must be made as uncritical as possible.

(2) Mastering. The ¼" tape is copied on to a 1" master.

(3) Master loop. The 1" master is formed into an endless loop by joining the ends together. The 1" loop is loaded into 1 of 5 master recording units and is driven round at 240" per second. The output is then used to record on to the cassette tape. A typical computer program master is run through the master unit's play heads once every 5 to 10 seconds. Each time the join in the tape comes round a small audio clip is transferred on to the cassette tapes



Loading the empty cassettes.

being recorded — this is the cue tone.

(4) Recording. The output from the master recorder is transferred to up to 14 slave units. These carry the cassette tape in the form of "pancakes" 8,500 feet long. The cassette tape is run at times the normal playing speed and more than 150 duplications are made every minute.

(5) Checking recording. From each batch of pancakes recorded, the final one is checked to ensure that the slave has been correctly set-up and the recording level is verified.

(6) Checking loading. This last recording from the pancake is then cut out into a cassette case and the loading characteristics of the tape on the computer are checked.

(7) Cutting out. If these two quality checks are passed the pancakes are taken downstairs to be cut out into the cassettes. Here the tape from the pancake is married with what are called C0s — cassettes containing only leader. The leader is drawn part across the cassette, is cut, and one program length off the pancake is spliced and wound in. The sections are cut off the pancake using the tones (put on by the gap in the master) to determine the beginning and end of each recording.

(8) Printing. The completed cassettes are stamped with the name and details of the program.

(9) Packing. Finally, the cassettes and card inserts are placed inside the cassette boxes.

Most computer cassettes are either C6 or C10 cassettes (3 or 5 minutes per side). It costs 33p plus VAT per C10 cassette duplicated, with a minimum order of 500 units. For orders of less than 1000 there is a small charge for mastering and for printing on to the cassette. The minimum charge is then £207 with a turn-round time of 4 to 5 days.


Tape Duplicating does not involve itself in the printing or production of the loose card inserts or packing. In many cases the packaging costs more than the cost of the cassette and duplication.

"In January this year," says Neil, "we were duplicating perhaps 1000 computer cassettes per month. This November we

are booked up to produce 240,000 units.

This will be our first software Christmas.

"Duplication of computer cassettes now takes up more than 10 percent of our work. The *Personal Computer World* show was ridiculous — we are still getting a flood of orders as a direct result of our being there.

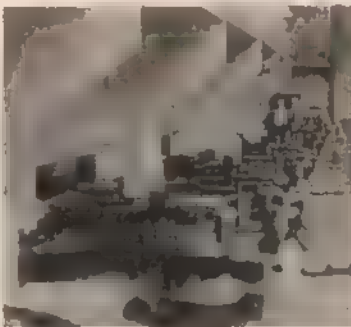

Recording on a bank of slave units.

"The reason is that software is the key to a machine's success. Without software a microcomputer will not sell. Look at the Dragon for example. So many people are writing for that machine that its future looks assured. We have something like 15 com-

panies that hope to do Dragon cassettes through us at the moment.

"Confidentiality is obviously very important. Most companies who launch a new machine want some software to be released at the same time. Consequently, we get a pretty good picture of what everybody is planning for the next six months. So obviously secrecy is vital to our continued business and good relations. That puts us firmly on the inside of the industry and — quite incidentally — helps us to plan what we should be doing.

"We have constantly to keep an eye open for pirates. So far we have only had one case of someone else's tape being presented to us for duplication and in fact it turned out to be perfectly legitimate. There are so few good programmers that it has reached the point where I can recognise their styles — and tell who wrote a program just by looking at it — like a fingerprint.


Piracy

"Piracy of our own cassettes is something we cannot really stop — we can make copying difficult — but not impossible. But it will only become a serious problem when the pirated copies start being marketed in any real quantities. This is almost certainly starting to happen.


"We are also exporting more and more material. A lot of Vic cassettes go overseas and more and more of our ZX81 titles also say TS1000. \$1.00 per tape is the figure that I have heard quoted for tape duplication in the US and our prices are competitive with that.

"Quite what will happen to the UK market is still very uncertain. Hopefully, the current boom will carry through to February next year as people buy software for the machines they received at Christmas.

"It is such a new market that there is no established seasonality yet — the machines haven't all arrived — the Lynx and Oric are still on their way and who knows about the Binatone — and the structure of the market hasn't settled down. I hope it will by next year. Staying one jump ahead is wearing me out.

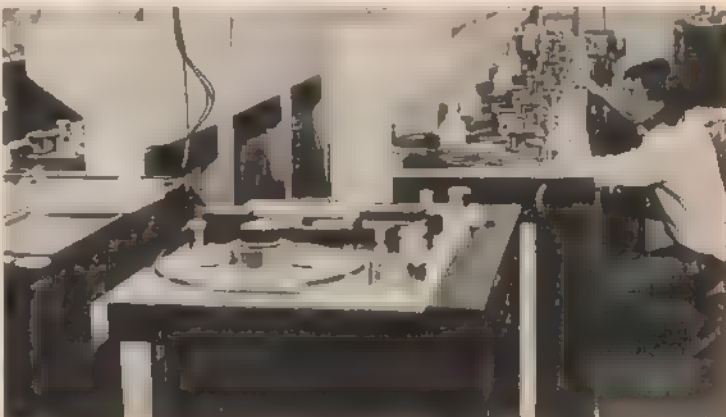

Master loop (foreground) used to record on to slave units.

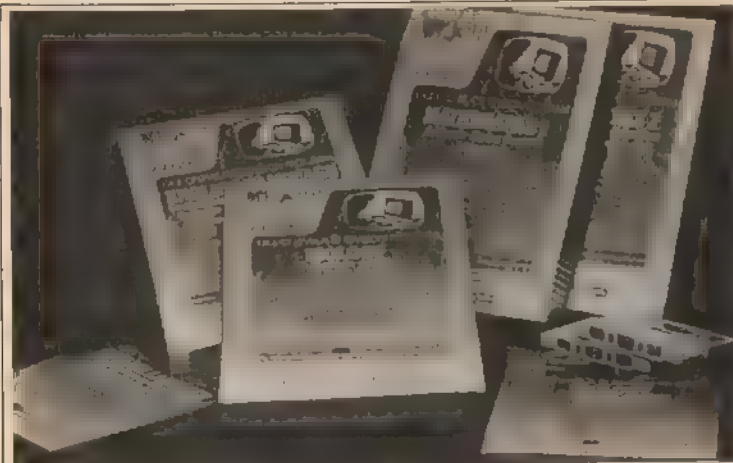

Capping 'em all with Mastermind

Mike Grace cuts his teeth on three of Commodore's latest Vic20 programs.

The introduction of the microchip into the home has received considerable publicity. While the computer hobbyist still buys his machine primarily to learn programming or play games, there is still a vast untapped market of people who do not want to spend all day zapping asteroids or munching blue meanies and who are just a little bit frightened of the idea of a machine that talks back — yet feel perhaps there will be a future for a computer in their home.

This market is big money, when compared with the hobbyist. There comes a stage when the appropriate software needs to be created to persuade this market to part with its money and purchase the hardware. Educational programs might seem to be the answer, satisfying the justification for Dad to actually buy that machine, which he hopes he will have time to play with, because he can persuade everyone that it is a good thing as it will help the children to learn more.

Commodore has come up with some new programs with fairly toned down covers, unlike the more lurid and eye-catching games, which are aimed specifically at the educational application of the Vic20. There are two main varieties at the moment — the GCE Revision programs, including subjects such as English Language, Biology, Physics, Chemistry and Mathematics and the Home Software range which includes quizzes and games for the family and subjects like Money Manager (the often-maligned cash-flow/bank balance program) and the Robert Carrier Family Menu Planner (the cookbook database).

All the programs are cassette-based, all require either 8K or 16K expansion, and all are neatly packaged in strong cardboard

boxes which contain a superbly-written booklet plus two cassettes tidily contained in plastic and easily removed from their packaging. The boxes open with a hinged lid. I was impressed with the style and quality of the packaging which, for the price (£9.99), seemed to be well above average. Ten pounds seems to be good value for money when compared with most other software around. But is it value for what you get?

The three programs I was sent for review were *Mastermind*, *Quizmaster* and *English Language Revision*. As all were basically the same in performance, I will start by describing *Mastermind* in some detail and then compare the other two.

At this stage I should point out that these programs come from the combined talents of Commodore and the Ivan Berg Software house. I hope that this 'marriage' continues, as I believe there is tremendous scope for the future. However, I also feel there are some flaws in the existing concepts which I shall come to in a moment.

Mastermind looks the most appealing program and I thought would be the best of the three, with a picture of the famous Mastermind chair on the cover of the box



Ivan Berg with Vic20 and Commodore/Ivan Berg software.

REVIEW

and the weight of the BBC behind it. On opening the instruction booklet there is a short introduction plus an even shorter summary of the game itself, for anyone living in a cave who may not be familiar with the idea.

The instructions really are excellent, assuming absolutely no knowledge of how to load programs yet displayed in a manner that allows the seasoned player to skip swiftly through the elementary advice. For each major segment of the loading instructions there is a clear photograph of the screen display. All my children dealt swiftly and easily with this section.

As I mentioned these programs are cassette-based, and I was here that I found the first problem — the loading time. In the booklet mention is made of this with the rather glib statement that the 1½-2 minutes it takes to load "adds to the tension and excitement." It might work with the first game, but after that it becomes tedious. While it makes sense to produce cassettes for the mass market, it would be nice to incorporate into the program the facility to save on disc both the main program (which of course you can if you have your own disk drive) and the data.

Once loaded, the Vic blurs into life by playing a short snatch of electronic music. Although the book told me this was the well-known Mastermind theme, I could not recognise it. Still, it only lasts about three seconds. And then we are into the game itself.

The idea is to copy the television game. The Vic takes the part of Magnus Magnusson and asks the questions. Each player must type in his answer and get through as many questions as possible in two minutes.

"I found the level of questions difficult to assess..."

There are several other data types available which allow participants to select topics such as Sport and Games, Music, Films and TV as their specialist subjects. The introductory kit comes with a tape which contains Science and Technology on one side and General Knowledge on the other. As the game is designed for up to four players, it would seem advisable to purchase the extra tapes. At £1.99 for each tape the cost of a complete package comes nearer to £26 (there are eight extra data tapes at the moment).

Quizmaster follows the same format as Mastermind, but this time you can construct and set your own questions. Once again there is a main operating cassette which loads the program, and a data tape which contains a sample test quiz to show how it is done. But you also have the option of entering a menu which will allow you to devise, set, edit and save your own quiz. And this time the total cost is £9.99.

In these quizzes there are three main types of questions, a multiple choice, true or false, or matched answer. As you devise your own quiz you are free to select any of the three types. The Vic asks you to

set the question, type the answer and select an appropriate score out of 100. With each quiz you have a maximum of 40 questions (which is no problem as I found it quite difficult to think of 10 at first). Having started on the quiz, you can save it at any stage and come back to it later.

What appealed to me about this program was that I could set whatever question I liked. For example, I have already created a quiz to test my five-year-old on his spelling and his multiplication tables.

The problem with Mastermind was the lack of sufficient data. Quite often the same question would be randomly thrown up during the same game — giving one player an unfair advantage. To be fair we were playing with the one data tape and so were quite restricted, but this is a definite snag.

In Quizmaster there is a clock display ticking away the seconds as you go through the quiz, but this is missing from the screen in Mastermind. Quite a serious omission from the excitement of the game I would have thought.

The final program I tested was the GCE English Language Revision. Obviously this time the questions are more specialised and the knowledge of a slightly higher standard. The booklet gives what I can only describe as short notes of guidance (difficult to see how to fit in the entire GCE syllabus in 5½ pages). The questions seemed to be very limited in scope as they are based on the notes in the booklet.

I found the level of questions difficult to assess as I am not a teacher, but I can imagine it would be a useful adjunct to a child who was finding a certain subject quite difficult. For most children, however, I feel it would have only limited value.

In summary then, I am pleased that

Commodore is launching into the expanded software scene. All three programs were well written, well presented and appeared bug-free. Each game comes with one cassette containing the operating software recorded twice on each side of the tape (surely a slight overkill of the belt and braces concept) in case of loading problems. Mastermind is the best game in the light of family playing, but I feel is overpriced for the scope available. However the cost of a cassette for more data seems very reasonable. The GCE revision program is also well presented but requires self-discipline. At £10 I think it is good value if your child finds that topic difficult, as it does make learning a little more enjoyable, but if your child is good at the subject I suspect it would quickly pall.

For my money Quizmaster is easily the best of the three. It contains simple advice on how to set up your own quiz, which can be as easy or hard as you wish, cover whatever topic you choose, act as a game for the family and allows you to change the data whenever you want.

My biggest complaint about all the programs was their inherent ability to bring home to me just how ignorant I am. It is perhaps a little distressing to find Mastermind has given me 3 out of 20 questions right. In fact, I think I'll just collect the family together again and we'll have another game...



Open Forum

Open Forum is for you to publish your programs and ideas.
It is important that your programs are bug free before you send them in. We cannot test all of them.
Contributions should be sent to: Popular Computing Weekly, Hobhouse Court,
19 Whitcomb Street, London WC2H 7HF.

How to contribute

Each week the editor goes through all the programs that you send to Open Forum in order to find the Program of the Week.

The author of that program will qualify for DOUBLE the usual fee we pay for published programs.
(The usual fee is £5.)

Presentation hints

Programs which are most likely to be considered for the Program of the Week will be computer printed and accompanied by a cassette.

The program will be well documented, the documentation being typed with a double spacing between each line.

The documentation should start with a general description of the program and then give some detail of how the program has been constructed and of its special features.

Listings taken from a ZX Printer should be cut into convenient lengths and carefully stuck down on to white paper, avoiding any creasing.

Please enclose a stamped, self-addressed envelope.

Screen \$

on ZX81

This is a machine-code version of the ZX Spectrum's Screen \$(Y,X) function for the ZX81.

My function returns the code of the character situated at Y,X on the screen. With this function basic versions of games such as Pacman can be reproduced with a more realistic running speed. Also Spectrum games containing Screen \$(Y,X) may be converted to the ZX81.

To use the function in your programs type in program A and run it. Now delete line 1. Now type in program B and the rest of your program. When you wish to find the contents of Y,X just Gosub 9000 and the answer will be in L.

For those just learning machine-code I have included a detailed list of how the code works. This function takes about 1/50th of a second to complete.

ADDRESS	HEX CODE	INSTRUCTION	BASIC
16514	00	—	X stored here
16515	00	—	Y stored here
16516	218240	LD HL,16514	LET HL = 16514
16519	4E	LD C,(HL)	LET C = PEEK HL
			10 LET C = X
16520	0600	LD B,0	LET B = 0
			20 BC = X
16522	2A0C40	LD HL,(DF)	LET HL = PEEK 16396
16525	23	INC HL	10 HL = start Memory Map
16526	09	ADD HL,BC	LET HL = HL + 1
16527	E5	PUSH HL	10 first square on screen
16528	218340	LD HL,16515	LET HL = HL + BC
16531	5E	LD E,(HL)	10 LET HL = HL + X
16532	1600	LD D,0	Store HL
			LET HL = 16515
16534	210000	LD HL,0	LET E = PEEK HL
16537	0621	LD B,33	10 LET E = Y
16539	19	ADD HL,DE	LET D = 0
16540	10FD	DJNZ -1	10 DE = Y
			10 LET HL = 0
16542	44	LD B,H	LET B = 33
16543	4D	LD C,L	LET HL = HL + DE
16544	1B	POP HL	10 HL = HL + Y
16545	99	ADD HL,BC	LET C = L
			LET HL = HL that was stored
16546	4E	LD C,(HL)	LET HL = HL + BC
			10 HL = HL + (33 * Y)
16547	0000	LD B,0	10 LET HL = PEEK HL
16549	C9	RET	20 C contains code of character at Y,X on screen
			LET B = 0
			RETURN

On Return from machine code Use 16516 = contents of BC so Let L = Use 16516 means Gosub 16516 and Let L = BC, but BC = code of character at Y,X on screen so L = code at Y,X on screen.

Program A

```
1 REM (36 ZERO's)
5 LET X = 16514
10 LET AS = "00002182404E0600"
11 LET AS = AS + "2A0C402309E5218340"
12 LET AS = AS + "5E160021000006211910FD"
```

Program B

```
9000 POKE 16514,X
9001 POKE 16515,Y
9002 LET L =USR 16516
9003 RETURN
```

by Bill Henderson

High-res characters

on Dragon

This short routine displays the character set which is available in each high resolution mode on the Dragon. The screen is filled with each character before the next character is displayed.

Program notes:

```
Lines
10 Reserves space for the machine code routine
20 Clears the screen then sets the start address for the machine code routine.
30 to 40 The routine to display the character is poked into storage
50 to 80 These lines alter the high resolution
```

mode and the colour set.
The machine code routine

A description of the machine code routine is given below:

```
Lines
06 00 LDA #0 — Pick up first character to be displayed.
0E 00 00 LDA #0 — Load index reg X with offset 0.
A7 89 05 00 STA 0500,X — Store the character at offset X from the top of the screen.
30 01 LEAX 1,X — Increment X by 1.
8C 18 00 CMPX #1800 — Is the screen full.
25 F5 BLO -11 — Loop until 4 pages full.
4C INCA — Increment character
26 EF BNE — Continue until all characters have been displayed.
39 RTS — Return to the calling program.
```




```

10 CLEAR 100,16383
20 CLS : S=16384
30 READ X
40 IF X <> -1 THEN POKE S,X : S=S+1 : GOTO 30
50 FOR PM=1 TO 4 : PMODE PM,1 : PCLS
60 FOR SC=0 TO 1 : SCREEN 1,SC
70 EXEC 16384
80 NEXT SC,PM
90 END
100 DATA 134,0,142,0,0,167,137,6,0,48,1,140,
      24,0,37,245,76,38,239,57,-1

```

High-res characters
by Howard Law

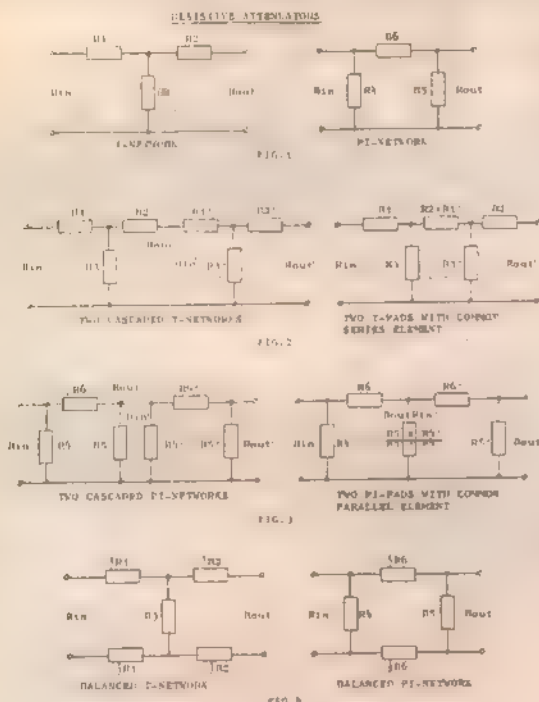

```

10 REM ATTENUATORS
20 REM D.H.G. & P.T.SCH. 1988
30 PRINT "ENTER 2 FOR T-NETWORK"
40 PRINT "ENTER 3 FOR PI-NETWORK"
50 INPUT "ENTER INPUT IMPEDANCE:" IIN
60 INPUT "ENTER OUTPUT IMPEDANCE:" IOUT
70 INPUT "ENTER FIRST CB VALUE:" CB1
80 INPUT "ENTER LAST CB VALUE:" CB2
90 INPUT "ENTER INTERIOR CB LIST:" CB3
100 PRINT "ENTER INTERIOR CB LIST:"
110 FOR I=1 TO 10
120 INPUT "ENTER INTERIOR CB LIST:" CB3
130 NEXT I
140 PRINT "UNBALANCED RESISTIVE ATTENUATORS"
150 IF CB1 THEN GOTO 200
160 GOTO 300
170 IF CB2 THEN GOTO 200
180 GOTO 300
190 IF CB3 THEN GOTO 200
200 PRINT "PI-NETWORK"
210 PRINT "ENTER R1, R2, R3, R4, R5, R6"
220 INPUT "R1:" R1
230 INPUT "R2:" R2
240 INPUT "R3:" R3
250 INPUT "R4:" R4
260 INPUT "R5:" R5
270 INPUT "R6:" R6
280 PRINT "ATTEN. = 10 * LOG (R1 * R2 / (R3 * R4 * R5 * R6))"
290 PRINT "ATT. = 10 * LOG (R1 * R2 / (R3 * R4 * R5 * R6))"
300 GOTO 200

```

Attenuators

on ZX81

Attenuators is a program which requires about 1,400 program bytes of memory on a ZX81. The program calculates and prints the results in table format of resistive attenuator networks, which are a basic part of any physics 'A' level course.

In practice T- and pi-network resistive attenuators or matching pads (Fig 1) are designed to give some convenient voltage ratio, which may be stated in decibels even though the input and output impedances are different. The attenuation figures in decibels used in the program are those equivalent to $20 \log (E_{in}/E_{out})$.

Each type has its subtle advantages and disadvantages. The pi-type for example, will dissipate power through all three resistors in case of no load, the T-type only through two resistors.

Attenuators giving more than 20dB loss and pads with high R_{in}/R_{out} ratios are usually built up of two or more basic networks in cascade.

For each pair of cascaded pads, make sure the output impedance of the first network is the same as the input impedance of the second network. Where a more permanent connection is intended, the two adjacent elements may be combined in a single resistor to form a ladder network as shown in Figs 2 and 3.

Any number of steps may be used in order to build up the required attenuation. For balanced networks the values of the series elements are half those for the basic T- or pi-attenuator, as shown in Fig 4.

If for a certain calculation with unequal R_{in} and R_{out} negative resistor values are obtained, then the chosen R_{in}/R_{out} ratio is too high. Try cascading to achieve the desired impedances. Run program and enter data as asked for on screen. If lists are longer than screen can hold, press Copy for a permanent record and press Cont for the rest of the results.

This is a very convenient way to interpret and check the results before they are printed. On the other hand one could change the Print statements from line 160 through to line 430 and obtain immediate hardcopy by inserting Lprint statements.

Line 470 prevents the program list being displayed after each Run. If higher than 1 ohm resolution is necessary the real values for R_1 , R_2 etc would have to be printed instead of integer values.

Program notes

Line(s)

- 10 to 140 select T- or pi-network. Enter input and output impedances. Enter table limits. speeds up calculations.
- 160 to 270 print appropriate headings.
- 280 to 290 define table parameters in For-Next loop.
- 300 decibel conversion.
- 310 to 370 T-pad formula.
- 380 prints rounded integer value T-pad results.
- 390 part of T-pad table loop.
- 400 to 420 pi-pad formula.
- 430 prints rounded integer value pi-pad results.
- 440 Next table loop.
- 450 prevents loss of sync on new data entry.
- 460 program stops, press Cont for new calculations and results.
- 470 starts again with data entry.

turn to page 10



MICROL[®] SPECTRUM

USE
AND
LEARN

16/48K CASSETTE SYSTEM

VOL.1: 25 BASIC PROGRAMS AVAILABLE NOW

USE

25 PRACTICAL BASIC programs you can put to work immediately—

Programs to demonstrate the wide-ranging potential of your 16 or 48K Spectrum:—

World Atlas — Cassette and Videocassette Index — Music Composer — Computer Term Glossary — Star Maps ...

Personal Programming Aids to help you write your own programs more effectively:—

Memory Map Monitor — System Diagnostic — Program debugging aids ... Time-saving routines to use in your own programs:—

Text Editor — Flexible graph drawing routines — Sort and Search routines ...

Plus much more.

And, of course, original games to entertain and challenge you.

£9.95

make your games more exciting — How and when to use trees, tables, sorts and searches (do you know the Monkey Puzzle sort?) ...

Facts at your Fingertips:—

Memory and runtime Benchmarks for every command — Display File Memory Map — Important PEEK and POKE locations you won't find in your Spectrum manual . Program Design Aids:—ScreenDesigners, for fast graphics and print layouts — Memory Manager, to keep track of every variable and array. PLUS:— All 25 BASIC programs explained line by line — a goldmine of practical hints and tips.



Send today for USE AND LEARN Volume 1— 25 BASIC Programs, and we'll also keep you posted with details of further important MiCROL products for your Spectrum. And, of course, USE AND LEARN comes with MiCROL's full 14-day money-back Guarantee.

LEARN

New ways to get the most from your Spectrum. Over 100 pages packed with —

Powerful programming techniques:— use Structured Programming to save time and make your programs more reliable — Ideas to

To order simply complete the coupon, and FREEPOST with your cheque, made payable to MiCROL (UK Mail Order). Allow 28 days for delivery. Telephone orders—credit card holders can order by telephoning (0223) 312866 from 9-5.30 Monday to Saturday, stating name and address, Card No. Access/Barclaycard/Visa and item(s) required.



MiCROL SPECTRUM

(0223) 312866

MAIL ORDER DISTRIBUTION EXCLUSIVELY BY TEMPUS OF CAMBRIDGE

38 Burleigh Street, Cambridge CB1 1BR.

Post to:— MiCROL (UK Mail Order) Freepost 38 Burleigh Street, Cambridge CB1 1BR

Please send me ... copies of USE AND LEARN vol. 1 I enclose cheque/P.O. for £9.95 plus 50p P&P (Total £10.45 each) Or I wish to pay by Access/Barclaycard/Visa

Card Number

Please print name and address

Name

Address

Credit card holder's signature

PCWk 11

Open Forum

from page 15

ZX81 ATTENUATOR PROGRAM - printed lists of results

UNBALANCED RESISTIVE ATTENUATORS T-NETWORK

R(IN)=50 OHMS R(OUT)=75 OHMS

ATT. DB	R1 OHMS	R2 OHMS	R3 OHMS
10	18	49	43
10.5	20	50	40
11	21	50	37
11.5	23	51	35
12	24	52	33
12.5	25	53	31
13	26	54	29
13.5	28	55	27
14	30	56	25
14.5	32	57	24
15	33	57	22
15.5	35	58	21
16	36	59	20

UNBALANCED RESISTIVE ATTENUATORS PI-NETWORK

R(IN)=50 OHMS R(OUT)=75 OHMS

ATT. DB	R4 OHMS	R5 OHMS	R6 OHMS
10	77	207	87
10.5	75	191	93
11	74	177	100
11.5	73	166	107
12	71	157	114
12.5	70	149	122
13	69	142	130
13.5	68	136	138
14	67	131	147
14.5	66	126	157
15	65	122	167
15.5	64	118	177
16	63	115	188

ABOVE: ZX81 copy of printout for T- and PI-networks with unequal input and output impedances.

BELOW: ZX81 copy of printout for T- and PI-networks with equal Rin and Rout.

UNBALANCED RESISTIVE ATTENUATORS T-NETWORK

R(IN)=500 OHMS R(OUT)=500 OHMS

ATT. DB	R1 OHMS	R2 OHMS	R3 OHMS
1	35	35	5200
1.5	32	32	3457
2	30	30	2583
2.5	28	28	2058
3	26	26	1703
3.5	24	24	1449
4	23	23	1268
4.5	22	22	1108
5	20	20	987
5.5	18	18	887
6	17	17	803
6.5	16	16	732
7	15	15	670
7.5	14	14	615
8	13	13	568
8.5	12	12	526
9	11	11	487
9.5	10	10	453
10	9	9	422
10.5	8	8	393
11	7	7	367
11.5	6	6	344
12	5	5	322
12.5	4	4	302
13	3	3	283
13.5	2	2	265
14	1	1	249
14.5	1	1	234
15	1	1	220
15.5	1	1	207
16	1	1	195
16.5	1	1	184
17	1	1	173
17.5	1	1	163
18	1	1	154
18.5	1	1	145
19	1	1	136
19.5	1	1	129
20	1	1	121

UNBALANCED RESISTIVE ATTENUATORS PI-NETWORK

R(IN)=500 OHMS R(OUT)=500 OHMS

ATT. DB	R4 OHMS	R5 OHMS	R6 OHMS
1	10435	10435	59
1.5	6955	6955	104
2	5235	5235	130
2.5	4198	4198	175
3	3509	3509	211
3.5	3018	3018	248
4	2652	2652	286
4.5	2368	2368	325
5	2142	2142	365
5.5	1958	1958	406
6	1806	1806	448
6.5	1678	1678	492
7	1569	1569	538
7.5	1475	1475	585
8	1394	1394	634
8.5	1323	1323	685
9	1260	1260	739
9.5	1204	1204	795
10	1155	1155	854
10.5	1111	1111	915
11	1071	1071	980
11.5	1035	1035	1048
12	1003	1003	1119
12.5	973	973	1194
13	946	946	1273
13.5	922	922	1356
14	899	899	1444
14.5	878	878	1536
15	858	858	1634
15.5	842	842	1737
16	826	826	1845
16.5	811	811	1960
17	797	797	2081
17.5	785	785	2210
18	773	773	2345
18.5	762	762	2489
19	752	752	2640
19.5	742	742	2800
20	733	733	2970

REFERENCE: Marconi Instruments, "Useful Data", page 285

Attenuators
by D. Fritsch

Open Forum

World Map

on Vic20

This program produces a map of the world in high-resolution graphics for the unexpanded Vic20. I think that it really does show all Vic owners what their basic machine can do considering the limited amount of Ram that it has.

The program plots a map of the world with a title printed above it which takes up about half of the screen.

The program is written in three parts and starts off with the setting up of the high-resolution screen; then comes the main body of the program consisting mainly of Data statements for the X,Y co-ordinates of the display and finally the point-plot subroutine.

The program starts off by copying all of the characters that are necessary for the

display from Rom to Ram memory locations which start at 6144 and go up to 7679; this is so that any changes that have to be made to the characters for the display can now be made (characters cannot be touched while in Rom). Memory pointers are also set in this line (line 10) by Poking 52,24 and 56,24. This is done so that the character information now comes from Ram where the copied characters are stored.

Line 15 prints the title and sets the screen and border colours. Line 20 lays out the high-resolution area of the screen by Poking the characters from 64 to 191 on to the screen. So that the title could be printed the characters from 0 to 63 were also copied into Ram (these are the normal letter characters etc). The title was only included in the display to show the use of both high-resolution and ordinary characters on the screen at the same time.

The next thing that the program does is

to turn all of the characters which are to be used for the display, ie 64 to 191 'off', that is, to set their memory locations to zero. This is done in line 25.

The next part of the program consists mainly of Data statements for the X,Y co-ordinates for the subroutine at lines 200 to 210. These lines calculate which memory location requires changing and then Pokes that memory location so that a 'pixel' is turned on (there are 8 x 8 pixels in every character).

The program takes about three minutes to complete the display because it is run in Basic, so to speed up the program it is best run with machine code subroutines (if memory space allows). The user of the program can delete all of the lines from 30 to 199 which leaves him with about 1800 bytes to write his own program which plots whatever he likes as long as he is within 127 x 63 on the X,Y co-ordinates (size of high-resolution area).

PROGRAM OF THE WEEK

```

10 T=6144 B=32768 FORI=0TO1535 POKEI+T,PEEK(I+9):NEXT I:POKE52,24:POKE56,24
15 PRINT"THE WORLD IN HIGH RES." POKE36879,138
20 FORI=0TO7 FORM=0TO7:POKE7706+M*32+I,I*8+M+64:POKE7714+M*32+I,I*8+M+128:NEXT
NEXT I
35 POKE36869,254 FORI=6656TO7679:POKEI,0:NEXT I
38 FORY=10TO59 READH IFH=0THENNEXTY
39 FORX=1TOH READJ READK FORX=JTOK:GOSUB200:NEXTX:NEXTY:DATA2,30,42,72,77
,1,24,24
40 DATA33,41,70,73,6,17,19,24,27,33,41,66,66,69,80,85,86,9,5,12,14,14,18,21,26,
,2,34
50 DATA41,73,56,60,61,64,66,68,90,6,4,17,20,25,27,29,34,40,52,55,58,96,5,5,28,2
,7,30
60 DATA34,39,42,43,51,37,5,4,23,29,29,34,37,41,43,50,95,5,4,22,27,28,35,36,49,5
,4,54,53
70 DATA6,2,1,11,12,27,10,50,52,54,68,90,20,5,13,24,27,31,46,46,53,85,89,90,6,14
,26,17
80 DATA32,45,45,47,47,49,34,89,30,3,14,32,46,46,48,85,2,15,29,47,85,4,15,30,32,
,12,47
90 DATA56,39,34,3,15,29,46,54,58,84,6,14,28,45,47,51,53,56,56,59,83,85,86,5,15,
,12,45,46
100 DATA51,51,53,53,56,21,5,16,27,47,49,57,79,81,81,84,84,4,17,26,45,51,57,79,8
,1,32
110 DATA2,18,25,45,73,5,18,22,26,26,44,56,58,60,63,79,4,19,22,43,56,58,62,66,79
,2,20,22
120 DATA26,27,43,56,59,62,66,78,5,21,24,43,57,59,61,67,69,72,75,4,22,25,43,57,6
,7,58,73
130 DATA76,5,25,25,29,30,43,60,68,68,74,75,4,26,31,44,60,68,68,74,74,5,27,33,45
,47,49,59
140 DATA74,74,73,73,4,27,34,50,59,73,73,77,78,4,26,35,50,58,74,74,77,78,4,26,37
,49,57
150 DATA74,75,83,85,4,26,38,50,58,77,77,85,86,3,26,38,51,58,87,87,5,27,37,51,58
,60,60
160 DATA82,83,85,85,5,28,37,51,57,59,60,80,83,85,85,4,29,36,51,57,59,60,79,86,4
,29,35
170 DATA51,56,59,59,77,87,4,29,34,52,56,59,59,77,88,3,29,34,52,55,78,88,3,29,34
,53,54,78
180 DATA87,4,28,33,53,53,78,79,83,87,3,28,32,84,86,93,93,1,28,31,2,28,30,93,93,
,2,28,30
190 DATA91,93,2,28,29,91,91,1,28,29,1,28,29,0,1,30,30
198 GETA$:IFA$=""THEN198
199 PRINT"00000000" POKE36869,240:END
200 C1=INT(X/8)*8-INT(Y/8) R1=(Y/8-INT(Y/8))*8 B1=6656+8*C1+R1 D1=7-(X-(INT(X/8
)))*8)
210 POKEB1,PEEK(B1)OR(2+D1):RETURN

```

World Map
by Gerhard Nauth

Asteroid Lander

on BBC Micro

The object of the game is to plant your planet's flag on the planet Zaxon. Zaxon, however, has a moving asteroid belt close to its surface, which must be negotiated to achieve a safe landing. You must land in the centre of the landing pad, which is located at the right-hand side of the screen. If you do land, the flag will automatically drop from your ship's cargo hatch. You will then take off again, and you must reach the top of the screen to complete your mission safely. This program will run on a BBC microcomputer, model B.

Program notes:

Lines
90 Switches the cursor off
100 Sets up the asteroid positions.
600 to 630 Makes a sound when you land.
660 to 650 Checks to see if you have hit an asteroid.
890 to 920 Makes an explosion sound if you crash.
1150 to 1370 Prints the instructions
1420 to 2010 Moves the asteroids

```
10 REM Asteroid Lander.
20 REM By Phillip Wells. Rev 10
30 REM For BBC Microcomputer Model B
40 MODE 7
50 PRINT "INSTRUCTIONS"
600: GOTO 1420
700: REM
80 MODE 7
90 GOTO 1420: GOTO 80
1000: REM
1100: REM
1200: REM
1300: REM
1400: REM
1500: REM
1600: REM
1700: REM
1800: REM
1900: REM
2000: REM
2100: REM
2200: REM
2300: REM
2400: REM
2500: REM
2600: REM
2700: REM
2800: REM
2900: REM
3000: REM
3100: REM
3200: REM
3300: REM
3400: REM
3500: REM
3600: REM
3700: REM
3800: REM
3900: REM
4000: REM
4100: REM
4200: REM
4300: REM
4400: REM
4500: REM
4600: REM
4700: REM
4800: REM
4900: REM
5000: REM
5100: REM
5200: REM
5300: REM
5400: REM
5500: REM
5600: REM
5700: REM
5800: REM
5900: REM
6000: REM
6100: REM
6200: REM
6300: REM
6400: REM
6500: REM
6600: REM
6700: REM
6800: REM
6900: REM
7000: REM
7100: REM
7200: REM
7300: REM
7400: REM
7500: REM
7600: REM
7700: REM
7800: REM
7900: REM
8000: REM
8100: REM
8200: REM
8300: REM
8400: REM
8500: REM
8600: REM
8700: REM
8800: REM
8900: REM
9000: REM
9100: REM
9200: REM
9300: REM
9400: REM
9500: REM
9600: REM
9700: REM
9800: REM
9900: REM
```

```
290 COLOUR 2:PRINTTAB(14,20):CHR$228CHR$226CHR$227
300COLOUR 3
310VDU 23,225,24,60,60,60,24,60,90,90
320X=10:Y=1
330COLOUR 1:PRINTTAB(X,Y):CHR$225)
340AB=INKEY$(0)
350IF AB="Z" THEN PROCFLEGT
360IF AB="X" THEN PROCRIGHT
370 IF Y=27 AND X=15 THEN PROCSUCC:GOTO 2830
380PRINTTAB(X,Y)"
390 REM
400Y=Y+1:IF Y=27 AND X=14 OR Y=27 AND
X=16 THEN PROCTILT:PROCRASH:PROCGAME
410IF Y>27 AND X<15 THEN PROCRASH
420 PROCMOVE
430 PROCHECK
440GOTO 330
450DEF PROCFLEGT
460PRINTTAB(X,Y)" X=X-1
470IF X<0 THEN X=X+1
480PRINTTAB(X,Y):CHR$225
490 PROCHECK
500GOTO 330
510ENDPROC
520DEF PROCRIGHT
530PRINTTAB(X,Y)" X=X+1
540IF X>19 THEN X=X-1
550PRINTTAB(X,Y):CHR$225
560 PROCHECK
570GOTO 330
580ENDPROC
590DEF PROCSUCC
600FOR XX=1 TO 20
610SOUND 1,-12,30,1
620SOUND 1,-12,100,1
630NEXT XX
640ENDPROC
650DEF PROCHECK
660IF X=A AND Y=10 THEN PROCRASH
670IF X=B AND Y=11 THEN PROCRASH
```

```
680IF X=C AND Y=12 THEN PROCRASH
690IF X=D AND Y=13 THEN PROCRASH
700IF X=E AND Y=14 THEN PROCRASH
710IF X=F AND Y=15 THEN PROCRASH
720IF X=G AND Y=10 THEN PROCRASH
730IF X=H AND Y=11 THEN PROCRASH
740IF X=I AND Y=12 THEN PROCRASH
750IF X=J AND Y=13 THEN PROCRASH
760IF X=K AND Y=14 THEN PROCRASH
770IF X=L AND Y=15 THEN PROCRASH
780IF X=M AND Y=10 THEN PROCRASH
790IF X=N AND Y=11 THEN PROCRASH
800IF X=O AND Y=12 THEN PROCRASH
810IF X=P AND Y=13 THEN PROCRASH
820IF X=Q AND Y=14 THEN PROCRASH
830IF X=R AND Y=15 THEN PROCRASH
840 IF X=S AND Y=10 THEN PROCRASH
850IF X=T AND Y=11 THEN PROCRASH
860ENDPROC
870DEF PROCRASH
880 PRINTTAB(X,Y)"
890SOUND 0,-15,6,20
900FOR I%=-15 TO 0
910SOUND 0,I%,6,3
920NEXT
930PROCGAME
940ENDPROC
950DEF PROCGAME
960 COLOUR 3
970CLS
980 IF Y=0 THEN PRINT" WELL DONE.
YOU:PRINT:PRINT"
COMPLETED YOUR:PRINT:
PRINT" MISSION SAFELY.:PRINT:PRINT
990PRINT" ANOTHER GAME (Y/N)"
1000AB=GET$
1010IF AB="Y" THEN RUN
1020IF AB<>"N" THEN GOTO 1000
```

Open Forum

```

1036CLS
1040ENDC
1050DEF PROC1
1060DEF PROC1CL
1070 COLOUR 1
1080VWU 23,230,0,56,120,127,124,26,18,16
1090PRINTTAB(X,28)"
1100PRINTTAB(X,28))CHR$230
1110ENUPROC
1120DEF PROCIInstructions
1130CLS
1140PRINT
1150FOR ZZZZ=0 TO 1:PRINTTAB(10,"
ZZZ CHR$(1)CHR$131
"HSTEROID LANDER"NEXT ZZZZ
1160PRINT
1170PRINT"As Captain of the SKYHAWK spaceship,"
1180PRINT"you must guide your craft throughn the"
1190PRINT"asteroids and plant on the Planet Xaxon"
1200PRINT"your Planet's flag, when - and if - you"
1210PRINT"land on the Planet, the flag will"
1220PRINT"automatically drop from the cargo hold."
1230 PRINT"If you do succeed in planting the flag,"
1240PRINT"you then have to reach the top of the"
1250PRINT"screen without hitting an asteroid..."
1260PRINT"You must land on the centre of the
1270PRINT"green landing pad, which is located on'
1280PRINT"the right hand side of the screen."
1290PRINT If you do not land in the centre of the"
1300PRINT"landing pad you will explode. If you"
1310PRINT"hit an asteroid you will also explode."
1320PRINT Keys for moving your spacecraft are"
1330PRINT as follows:"
1340PRINT
1350PRINTCHR$131"Z - LEFT           X - RIGHT"
1360PRINT
1370PRINTCHR$130          PRESS ANY KEY TO START"
1380R#=#GET#
1390ENDPROC
1400DEF PROCMOVE
1410 COLOUR 4
1420PRINTTAB(A,10)" "A=A-1:IF A<0 THEN A=10
1430PRINTTAB(A,10)):CHR$224
1440COLOUR 1:PRINTTAB(X,Y):CHR$225:COLOUR 4
1450PRINTTAB(B,11)" "B=B-1:IF B<0 THEN B=10
1460PRINTTAB(B,11)):CHR$224
1470COLOUR 1:PRINTTAB(X,Y):CHR$225:COLOUR 4
1480PRINTTAB(C,12)" "C=C-1:IF C<0 THEN C=10
1490PRINTTAB(C,12)):CHR$224
1500COLOUR 1:PRINTTAB(X,Y):CHR$225:COLOUR 4
1510PRINTTAB(D,13)" "D=D-1:IF D<0 THEN D=10
1520PRINTTAB(D,13)):CHR$224
1530COLOUR 1:PRINTTAB(X,Y):CHR$225:COLOUR 4
1540PRINTTAB(E,14)" "E=E-1:IF E<0 THEN E=10
1550PRINTTAB(E,14)):CHR$224
1560COLOUR 1:PRINTTAB(X,Y):CHR$225:COLOUR 4
1570PRINTTAB(F,15)" "F=F-1:IF F<0 THEN F=10
1580PRINTTAB(F,15)):CHR$224
1590COLOUR 1:PRINTTAB(X,Y):CHR$225:COLOUR 4
1600PRINTTAB(G,16)" "G=G-1:IF G<0 THEN G=10
1610PRINTTAB(G,16)):CHR$224
1620COLOUR 1:PRINTTAB(X,Y):CHR$225:COLOUR 4
1630PRINTTAB(H,17)" "H=H-1:IF H<0 THEN H=10
1640PRINTTAB(H,17)):CHR$224
1650COLOUR 1:PRINTTAB(X,Y):CHR$225:COLOUR 4
1660PRINTTAB(I,18)" "I=I-1:IF I<0 THEN I=10
1670PRINTTAB(I,18)):CHR$224
1680COLOUR 1:PRINTTAB(X,Y):CHR$225:COLOUR 4
1690PRINTTAB(J,19)" "J=J-1:IF J<0 THEN J=10
1700PRINTTAB(J,19)):CHR$224
1710COLOUR 1:PRINTTAB(K,20):CHR$225:COLOUR 4
1720PRINTTAB(K,20)" "K=K-1:IF K<0 THEN K=10
1730PRINTTAB(K,20)):CHR$224
1740COLOUR 1:PRINTTAB(X,Y):CHR$225:COLOUR 4

```

Asteroid Lander

by Philip Wells

ZX81

HEWSON CONSULTANTS

ZX SPECTRUM

20 BEST PROGRAMS FOR THE ZX SPECTRUM

By Andrew Hewson £3.95

AN HELPERLINE — the man who answers your ZX queries in his column in Sinclair User. The author of HINTS & TIPS FOR THE ZX80 and HINTS & TIPS FOR THE ZX81 now presents his 20 BEST PROGRAMS FOR THE ZX SPECTRUM

- 20 original programs for you to load into your Spectrum
- 20 interesting programs for you to study and learn from
- 20 great programs for you to teach you about land and variable length records, binary searches, bubble sorts, rotating point arithmetic, graphic displays and much, much more

Program: Inter include Machine code editor —

Write, modify, extend and load machine code using this all-in-one machine code editor. No need to use an Assembler when you have this program. Learn about fixed length records, store numeric and string fields, add to sort, modify, delete and print your records. Ideal as a computer based card index. Learn how to manipulate the attribute file and have fun at the same time. Binary searches and variable record lengths are explained with this useful and interesting program.

PLUS FOOTBALL, DIGITISER, DATA PLOT, FUNCTION PLOT, REGRESSION, HISTOGRAM and many more

Contents:

SPACE INVADERS	£3.95
ZX81 PROGRAMMERS TOOLKIT	£3.95
ZX81 PROGRAMMERS TOOLKIT for the 64K	£3.95
ZX81 STATISTICS	£3.75
ZX81 LANGUAGE DICTIONARY	£3.75
ZX81 NAVAL BLOCKADE	£4.00
ZX81 MACHINE CODE EDITOR	£4.00
ZX SPECTRUM MUSIC & SKETCH	£4.00
ZX SPECTRUM	£4.00

LINER NUMBER

£4.95

PROBABLY THE MOST USEFUL UTILITY PROGRAM for the ZX81. Line Renumber is a line machine code program which resides in 16K above Ramtop, leaving you 15K to load your own programs etc. At your command, Line Renumber will renumber your program including the destination lines of GOTO's and GOSUB's (line numbers only). Line Renumber is available for use with 16 and 64K machines. Please specify which you require (B&W version resides at 8192).

NIGHTFLITE

ZX SPECTRUM

£5.95

PUCKMAN NEW!

£5.95



NIGHTFLITE PUTS YOU AT THE CONTROLS OF A LIGHT AIRCRAFT FLYING AT NIGHT. YOU CAN:

- CLIMB ● DESCEND ● TAKE OFF ● LAND
- TURN ● BANK LEFT OR RIGHT
- NAVIGATE BETWEEN BEACONS
- RAISE LOWER THE FLAPS
- RAISE LOWER THE UNDERCARRIAGE
- ADJUST ENGINE RPM
- RAISE LOWER THE NOSE VARYING AMOUNTS

Runway lights appear on approach. 5 modes including Autopilot. Whistles by a qualified light aircraft pilot.

Z80 OP CODES

£1.45

It must be the beginner and the experienced programmer alike. This handy ready reference lists all 256 Z80 machine code instructions in decimal and hexadecimal with their mnemonics. Each Op Code is succinctly explained and cross referenced. Supported in a protective transparent wallet for easy reference and durability.

PROGRAMMERS TOOLKIT

£3.95

The Programmer's Friend and Slave! Are you writing your own programs for the ZX81? How can you do that without our Toolkit? It will encourage you to go on to write bigger, better and more sophisticated programs by doing your day's work.

Simply create 32K of space above Ram top and then load the Toolkit in the normal way. The Toolkit resides above the Ram top awaiting your command. You can now load existing programs from cassette for the Toolkit to operate on, or type in a whole new program!

Toolkit functions include:

- RENUMBER including the destination lines of GOTO's and GOSUB's
- START and Finish lines and Step size specified by you
- DELETE: delete all of a program at your command
- REPLACE: character(s) or token(s) with an equal number of others specified by you
- EDIT to create subroutines at a stroke by moving blocks of basic program lines
- FIND a basic program string specified by you
- INPUT prompts for a two digit hexadecimal code and gives it in a specified address
- Separate versions available for 16K, 48K and 64K machines (resides at 8192)

- All action display
- Score the maze for lead
- Dodge the ghosts who come to devour you
- Automatic option — the machine plays itself
- Full keyboard display
- Continuous scoring
- Best the best score to date
- Super graphics when used with Quick Save graphics board



PILOT ★

£5.95

New and exciting Pilot challenges you to take off, fly between beacons, then land whilst watching wind speed and dodging craggy mountains — either could lead to disaster! If you take the challenge, you may soon learn to fly solo — to do that is the flying instructions. Coast along in Autopilot — just to gain confidence, then battle your way through 5 further modes. 5 different ways of trying to beat your plane safely back to base, increasing in difficulty, testing your skills. Good luck with your light against the unpredictable elements!



SEND S.A.E. FOR FULL CATALOGUE OF HARDWARE, SOFTWARE AND LATEST PRICES

Cheque with order or quote Access or Bantayward number to HEWSON CONSULTANTS, Dept. POC, 60A St Mary's Road, Wellingborough, Northants NN11 0EL

AS SEEN ON THE BBC COMPUTER PROGRAMME WHY BUY THE BBC MICROCOMPUTER?



Only this machine has the massive endorsement of the Department of Education for use in all schools, of the BBC itself through its Computer Literacy Pages, and above all in the BBC TV series on Computer Programming.

The BBC Microcomputer also boasts Expansion Capabilities unparalleled in any other home computer.

Why buy from Data Exchange?

As an authorised distributor, we have large stocks available now, in time for Christmas, and the new BBC Computer Programming series in January.

Don't be disappointed, ORDER NOW, from **DATA EXCHANGE**

Price list including VAT:

BBC Model A	£299.00 (+ £5.00 p+p)
BBC Model B	£399.00 (+ £5.00 p+p)
Cassette Player	£34.00 (+ £2.00 p+p)
Sekoaha Printer	£245.00 (+ £4.00 p+p)

Beebstick — all leads included

Prices include post and packing.

SOFTWARE

Free Invaders game with each machine purchased.

Full list available on request.

PLEASE SEND ME

I ENCLOSE A CHEQUE/POSTAL ORDER TO THE VALUE OF £

NAME

ADDRESS

DATA EXCHANGE

41 HAMILTON SQUARE
BIRKENHEAD, MERSEYSIDE L41 5BP.

Please make cheques payable to: Data Exchange Ltd.

Tel: 051-647 9185/6

POC 2

Save it for a rainy day

John Durst completes his article on memory saving techniques.

Storing a character in the recognised ZX character code often uses a good many more bits than are required to store the actual information. For instance, the figure "1" has a code, 29, — which is 0001 1101 in Binary. This uses five of the eight bits available, whereas you only need to code one bit, 0000 0001, which has the value "1".

By looking for these values, rather than the characters for each digit, you can always code for two digits in one byte, and sometimes for three. There are 256 possible characters. So you can code "123456" as, "CHR\$ 12, CHR\$ 34, CHR\$ 56", which only uses three bytes, instead of six. To get the number out of the code, you get the ZX to print the appropriate Codes.

But you run into a snag when you try a practical application, like a telephone number. To ring *Popular Computing Weekly* you have to dial, "01 839 6835". If you code this, as I've described above, you will probably come up with, "018396835". When you de-code it, you get, 18396835. You have lost the spacing which makes the number easier to remember, and, more importantly, you have lost the leading zero, so that the STD dialling is up the spout.

What we need is a system which will keep the zeros and preserve the spaces in their proper place. In fact, we need a system which counts in 11s, rather than in 10s — digits 0 to 9 = 10, plus "space" = 11. We can still get two sets of digits into a single byte, because 11×11 is only 121, which is well within the limit of 256.

So much for the theory, but what about the practice? Well, Figure 3, lines 10 to 90 give a simple Basic program, which will code the numbers and spaces into two halves of a single byte. The de-coding, once again, is more handily done with machine code as listed in figures 1 and 2.

The coding is split into two sections, because the first part is identical with the machine code given in last week's article. Its purpose is to locate the beginning of Z\$ among the variables. You should have your coded number ready in Z\$. The second part of the code will work out the number, spaces and all, and print it.

The first part of the code has been set up as a subroutine named *FindZ\$*. This subroutine is called at the beginning of the main *Usr* routine.

You will have to enter the machine code in columns 2, 3 and 4 exactly as listed, using the Hex loader I showed last week. Remember to allow enough blobs in the Line 1 Rem statement, to make room for

the machine code. You should have at least 39.

Once you have entered the machine code, you can add lines 90 and 100 and Run the program. Enter the telephone number of your choice, press *Newline* and "Hey presto!" out comes the coded version of the number, with the de-coded number underneath.

In a practical program, you would probably store the coded numbers in an array. Then you would have to arrange to dig them out and get them into Z\$, using a line such as *Let Z\$ = B\$(J)*, immediately

before the *Rand Usr* 16531.

If you want, you could incorporate the Mr & Mrs program, given last week, into the same block of machine code. To do this you should load another Cd 82 40 immediately after the 18 ED, which will call the *FindZ\$* subroutine again. Follow this with the second half of last week's listing, starting at 06 02 AF.

When you want to call this routine, you should use *Usr* 16553. You would then need 55 spaces in Line 1 Rem to make room for the machine code for the two programs.

CODING & DECODING A TELEPHONE NUMBER

4082	3E	5F	LD	A, 5F
4084	01	FC	LD	BC, FFFC
4087	2A	14	LD	HL, (4014)
408A	2B		DEC	HL
408B	03		INC	BC
408C	0E		CP	(HL)
408D	20	FB	JR	NZ, 408A
408F	23		INC	HL
4090	23		INC	HL
4091	23		INC	HL
4092	C9		RET	

Fig. 1 Subroutine: *FINDZ\$*

4093	CD	02	40	CALL	4082	CALL FINDZ\$
4096	05	02		LD	B, 02	
4098	AF			XOR	A	
4099	ED	6F		RLO		
409B	FE	00		CP	00	
409D	20	02		JR	Z, 40A1	
409F	C6	1B		ADD	A, 1B	
40A1	D7			RET	10	
40A2	10	F4		DJNZ	409B	
40A4	0D			DEC	C	
40A5	C6			RET	Z	
40A6	23			INC	HL	
40A7	1B	ED		JR	4095	

Fig. 2 Decode & print Phone No: in Z\$

```

1 REM Y? UNPLOT COPY E=RAND?
24 CLS 777TAN LN RAND? GOSUB ?
RETURN C LEN .NOT ( POKE $COS
7/ GOSUB 222222222222222222222222
22
10 DIM X$(12)
20 INPUT X$
30 FOR J=1 TO 12 STEP 2
40 LET X=(0 AND X$(J))+" "+(CO
DE X$(J)-27 AND X$(J)<>" ")
50 LET Y=(0 AND X$(J+1))+" "+(
CODE X$(J+1)-27 AND X$(J+1)<>" ")
60 LET X$(J/2+.5)=CHR$ (16+X+Y)
70 NEXT J
80 LET Z$=X$ ( TO 6)
90 PRINT Z$
100 RAND USR 16531

?
01 839 6835

```

Fig. 3

BASIC program encodes 12 digit phone No: in 6 digits (in Z\$)

Dwelling on Ragnarök

John Scriven gives a few hints and tips on writing structured programs.

Some of the points I am going to raise will no doubt irritate a number of you, outrage a few, and unfortunately confuse others. I hope that somewhere in the gloom, this article may help you to think about the programs you write and at least prevent you from passing on your faults to others.

Before I start, there are two important points — (1) I have been guilty of most of the following faults myself, and moments of weakness still fall prey to them, and (2) there are no such things as perfect programs, only those that suffice until a better version comes along.

When writing a program, the first thing to do is switch off your computer, go away and find yourself a piece of paper. Naturally you need to know which computer you are writing for, both its potential and limitations, but actually composing the keyboard is not the best thing to do. This is a terribly difficult habit to break and only became easy when I realised that I could sit in a pub or on the beach and continue to program.

Sketch a rough design for the program on paper. These questions may help — what is its purpose? Who will use it? Does it need instructions to run? Does it need graphics, sound, etc?

At this stage, it is a good idea to work out a flow of control through the program. You do not need to use standard flow-chart symbols unless you wish to. As an example, I will write a program to demonstrate to primary school-children how to build up a curve from straight lines (curve stitching, as it is more usually called).

RUN → INITIALISE → INSTRUCTIONS → MAIN PROG. → REPEAT?

Attending to the needs of the user first is called the *Outside-In* approach (although many people do not use these rather fiendish terms, you may come across them in text-books).

Now you need to sort out the flow of control in terms of line numbers, then use them to help organise your program. One way is to have a control module at, say, line 1000 and subroutines at, for instance, 2000, 3000, etc.

Designing a program using a modular approach is often called the *Top-Down* method, a term borrowed from psychology (Note that these methods are not mutually exclusive, but that the best bits of each are combined).

In the example program, it produces a result like this:—

1000 REM Control Module
1010 GOSUB 2000 REM Initialisation

1020 GOSUB 3000 REM Instructions
1030 GOSUB 4000 Main Program
1040 GOSUB 5000 REM Repeat Option
1050 GOTO 1020 REM Repeat Chosen

In effect, the program has now been written — it only needs the subroutines to be filled in. You may have subroutines that perform particular functions already on cassette, in which case it is comparatively simple to merge them with new programs. If you do not happen to have any subroutines handy then it is necessary to sit down with some paper and work some out. It is only at this stage that you need to switch on the computer and try them out.

First, the subroutine that handles initialisation. If you state somewhere $Let A = X$, then you should have assigned a value to X previously. Some machines assign a default value, usually 0, to undefined variables, but the Spectrum will produce an error message telling you at which line you have attempted to use the undefined variable.

If you use a subroutine to initialise variables and also label them using Rem statements, rather than dot them about as and when they occur, you can see at a glance which ones you have used previously and what their purpose is. It should be clear that you do not necessarily know these subroutines at the development stage of your program, so set up the first line and add to it when ready.

2000 REM Initialisation Module
2010 LET A = 1, etc

The curve stitching program needs no initialisation as such, so it can simply be used to set up the colours of the border, paper, and ink, etc.

To design the main program module, try sketching a few lines on paper to show what the display should be like. On a Spectrum, there are 256×176 points you can define, so a piece of graph paper with at least 26×18 squares may be a help.

How will the display be built up? It is possible to define each line on the screen

one at a time, but this is wasteful on memory and hardly elegant. If you know the starting position for each line and the step size, it is better to use a **FOR-NEXT** loop. Many programs that appear in magazines could be improved a great deal by use of loops. A brief example of a character generator may suffice:

```
10 POKE USR "a", 128
20 POKE USR "a", 1,56
30 POKE USR "a", 2,23
40 POKE USR "a", 3,45
50 POKE USR "a", 4,14
60 POKE USR "a", 5,10
70 POKE USR "a", 6,20
80 POKE USR "a", 7,128
```

```
10 FOR N=0 TO 7
  READ X
30 POKE USR "a",N,X
40 NEXT N
50 DATA 128,56,23,45,14,10,20,128
```

The curve stitching main module can be trimmed by using a loop to generate lines from all four sides of the square at the same time. Note that the program lines are spaced 10 lines apart. Even on a machine with a renumbering facility, it is useful to be able to insert lines you need at a later stage.

The repeat module is fairly simple. If you offer someone the chance of restarting the program, you can use an **Inkey\$** function to check for a certain response from the keyboard. This successfully error-traps the user response — any other key press apart from **Break** is ignored.

If this program is to be used by anyone apart from yourself, it needs documentation, ie notes on how to run the program, what it does, how to change it, memory requirements, etc. This information can be on paper, or it can be present in a limited form inside the program.

As this program may be used by young

to page 25

```
10 REM *CURVE STITCHING*
20 REM
30 REM © JOHN SCRIVEN 23.7.82
40 REM
1000 REM *****
1010 REM Control Module
1020 REM
1030 GO SUB 2000: REM Initialisation
1040 REM
1050 GO SUB 3000: REM Instructions
1060 REM
1070 DO SUB 4000: REM Main Prog
1080 REM
1090 DO SUB 5000: REM Repeat Op
1100 REM
1110 GO TO 1020: REM Repeat Chosen
1120 REM *****
1200 REM *****
1210 REM Initialisation
1220 REM
1230 BORDER 7: PAPER 7: INK 1: C
1240 REM *****
1300 REM *****
1310 REM Instructions
1320 REM
1330 PRINT "You will be able
1340 PRINT "to see the curves become strong
1350 PRINT "as the lines get closer to
1360 PRINT "If you get tired
1370 PRINT "
1380 PRINT "
1390 PRINT "
1400 PRINT "
1410 PRINT "
1420 PRINT "
1430 PRINT "
1440 PRINT "
1450 PRINT "
1460 PRINT "
1470 PRINT "
1480 PRINT "
1490 PRINT "
1500 PRINT "
1510 PRINT "
1520 PRINT "
1530 PRINT "
1540 PRINT "
1550 PRINT "
1560 PRINT "
1570 PRINT "
1580 PRINT "
1590 PRINT "
1600 PRINT "
1610 PRINT "
1620 PRINT "
1630 PRINT "
1640 PRINT "
1650 PRINT "
1660 PRINT "
1670 PRINT "
1680 PRINT "
1690 PRINT "
1700 PRINT "
1710 PRINT "
1720 PRINT "
1730 PRINT "
1740 PRINT "
1750 PRINT "
1760 PRINT "
1770 PRINT "
1780 PRINT "
1790 PRINT "
1800 PRINT "
1810 PRINT "
1820 PRINT "
1830 PRINT "
1840 PRINT "
1850 PRINT "
1860 PRINT "
1870 PRINT "
1880 PRINT "
1890 PRINT "
1900 PRINT "
1910 PRINT "
1920 PRINT "
1930 PRINT "
1940 PRINT "
1950 PRINT "
1960 PRINT "
1970 PRINT "
1980 PRINT "
1990 PRINT "
2000 PRINT "
2010 PRINT "
2020 PRINT "
2030 PRINT "
2040 PRINT "
2050 PRINT "
2060 PRINT "
2070 PRINT "
2080 PRINT "
2090 PRINT "
2100 PRINT "
2110 PRINT "
2120 PRINT "
2130 PRINT "
2140 PRINT "
2150 PRINT "
2160 PRINT "
2170 PRINT "
2180 PRINT "
2190 PRINT "
2200 PRINT "
2210 PRINT "
2220 PRINT "
2230 PRINT "
2240 PRINT "
2250 PRINT "
2260 PRINT "
2270 PRINT "
2280 PRINT "
2290 PRINT "
2300 PRINT "
2310 PRINT "
2320 PRINT "
2330 PRINT "
2340 PRINT "
2350 PRINT "
2360 PRINT "
2370 PRINT "
2380 PRINT "
2390 PRINT "
2400 PRINT "
2410 PRINT "
2420 PRINT "
2430 PRINT "
2440 PRINT "
2450 PRINT "
2460 PRINT "
2470 PRINT "
2480 PRINT "
2490 PRINT "
2500 PRINT "
2510 PRINT "
2520 PRINT "
2530 PRINT "
2540 PRINT "
2550 PRINT "
2560 PRINT "
2570 PRINT "
2580 PRINT "
2590 PRINT "
2600 PRINT "
2610 PRINT "
2620 PRINT "
2630 PRINT "
2640 PRINT "
2650 PRINT "
2660 PRINT "
2670 PRINT "
2680 PRINT "
2690 PRINT "
2700 PRINT "
2710 PRINT "
2720 PRINT "
2730 PRINT "
2740 PRINT "
2750 PRINT "
2760 PRINT "
2770 PRINT "
2780 PRINT "
2790 PRINT "
2800 PRINT "
2810 PRINT "
2820 PRINT "
2830 PRINT "
2840 PRINT "
2850 PRINT "
2860 PRINT "
2870 PRINT "
2880 PRINT "
2890 PRINT "
2900 PRINT "
2910 PRINT "
2920 PRINT "
2930 PRINT "
2940 PRINT "
2950 PRINT "
2960 PRINT "
2970 PRINT "
2980 PRINT "
2990 PRINT "
3000 PRINT "
3010 PRINT "
3020 PRINT "
3030 PRINT "
3040 PRINT "
3050 PRINT "
3060 PRINT "
3070 PRINT "
3080 PRINT "
3090 PRINT "
3100 PRINT "
3110 PRINT "
3120 PRINT "
3130 PRINT "
3140 PRINT "
3150 PRINT "
3160 PRINT "
3170 PRINT "
3180 PRINT "
3190 PRINT "
3200 PRINT "
3210 PRINT "
3220 PRINT "
3230 PRINT "
3240 PRINT "
3250 PRINT "
3260 PRINT "
3270 PRINT "
3280 PRINT "
3290 PRINT "
3300 PRINT "
3310 PRINT "
3320 PRINT "
3330 PRINT "
3340 PRINT "
3350 PRINT "
3360 PRINT "
3370 PRINT "
3380 PRINT "
3390 PRINT "
3400 PRINT "
3410 PRINT "
3420 PRINT "
3430 PRINT "
3440 PRINT "
3450 PRINT "
3460 PRINT "
3470 PRINT "
3480 PRINT "
3490 PRINT "
3500 PRINT "
3510 PRINT "
3520 PRINT "
3530 PRINT "
3540 PRINT "
3550 PRINT "
3560 PRINT "
3570 PRINT "
3580 PRINT "
3590 PRINT "
3600 PRINT "
3610 PRINT "
3620 PRINT "
3630 PRINT "
3640 PRINT "
3650 PRINT "
3660 PRINT "
3670 PRINT "
3680 PRINT "
3690 PRINT "
3700 PRINT "
3710 PRINT "
3720 PRINT "
3730 PRINT "
3740 PRINT "
3750 PRINT "
3760 PRINT "
3770 PRINT "
3780 PRINT "
3790 PRINT "
3800 PRINT "
3810 PRINT "
3820 PRINT "
3830 PRINT "
3840 PRINT "
3850 PRINT "
3860 PRINT "
3870 PRINT "
3880 PRINT "
3890 PRINT "
3900 PRINT "
3910 PRINT "
3920 PRINT "
3930 PRINT "
3940 PRINT "
3950 PRINT "
3960 PRINT "
3970 PRINT "
3980 PRINT "
3990 PRINT "
4000 PRINT "
4010 PRINT "
4020 PRINT "
4030 PRINT "
4040 PRINT "
4050 PRINT "
4060 PRINT "
4070 PRINT "
4080 PRINT "
4090 PRINT "
4100 PRINT "
4110 PRINT "
4120 PRINT "
4130 PRINT "
4140 PRINT "
4150 PRINT "
4160 PRINT "
4170 PRINT "
4180 PRINT "
4190 PRINT "
4200 PRINT "
4210 PRINT "
4220 PRINT "
4230 PRINT "
4240 PRINT "
4250 PRINT "
4260 PRINT "
4270 PRINT "
4280 PRINT "
4290 PRINT "
4300 PRINT "
4310 PRINT "
4320 PRINT "
4330 PRINT "
4340 PRINT "
4350 PRINT "
4360 PRINT "
4370 PRINT "
4380 PRINT "
4390 PRINT "
4400 PRINT "
4410 PRINT "
4420 PRINT "
4430 PRINT "
4440 PRINT "
4450 PRINT "
4460 PRINT "
4470 PRINT "
4480 PRINT "
4490 PRINT "
4500 PRINT "
4510 PRINT "
4520 PRINT "
4530 PRINT "
4540 PRINT "
4550 PRINT "
4560 PRINT "
4570 PRINT "
4580 PRINT "
4590 PRINT "
4600 PRINT "
4610 PRINT "
4620 PRINT "
4630 PRINT "
4640 PRINT "
4650 PRINT "
4660 PRINT "
4670 PRINT "
4680 PRINT "
4690 PRINT "
4700 PRINT "
4710 PRINT "
4720 PRINT "
4730 PRINT "
4740 PRINT "
4750 PRINT "
4760 PRINT "
4770 PRINT "
4780 PRINT "
4790 PRINT "
4800 PRINT "
4810 PRINT "
4820 PRINT "
4830 PRINT "
4840 PRINT "
4850 PRINT "
4860 PRINT "
4870 PRINT "
4880 PRINT "
4890 PRINT "
4900 PRINT "
4910 PRINT "
4920 PRINT "
4930 PRINT "
4940 PRINT "
4950 PRINT "
4960 PRINT "
4970 PRINT "
4980 PRINT "
4990 PRINT "
5000 PRINT "
5010 PRINT "
5020 PRINT "
5030 PRINT "
5040 PRINT "
5050 PRINT "
5060 PRINT "
5070 PRINT "
5080 PRINT "
5090 PRINT "
5100 PRINT "
5110 PRINT "
5120 PRINT "
5130 PRINT "
5140 PRINT "
5150 PRINT "
5160 PRINT "
5170 PRINT "
5180 PRINT "
5190 PRINT "
5200 PRINT "
5210 PRINT "
5220 PRINT "
5230 PRINT "
5240 PRINT "
5250 PRINT "
5260 PRINT "
5270 PRINT "
5280 PRINT "
5290 PRINT "
5300 PRINT "
5310 PRINT "
5320 PRINT "
5330 PRINT "
5340 PRINT "
5350 PRINT "
5360 PRINT "
5370 PRINT "
5380 PRINT "
5390 PRINT "
5400 PRINT "
5410 PRINT "
5420 PRINT "
5430 PRINT "
5440 PRINT "
5450 PRINT "
5460 PRINT "
5470 PRINT "
5480 PRINT "
5490 PRINT "
5500 PRINT "
5510 PRINT "
5520 PRINT "
5530 PRINT "
5540 PRINT "
5550 PRINT "
5560 PRINT "
5570 PRINT "
5580 PRINT "
5590 PRINT "
5600 PRINT "
5610 PRINT "
5620 PRINT "
5630 PRINT "
5640 PRINT "
5650 PRINT "
5660 PRINT "
5670 PRINT "
5680 PRINT "
5690 PRINT "
5700 PRINT "
5710 PRINT "
5720 PRINT "
5730 PRINT "
5740 PRINT "
5750 PRINT "
5760 PRINT "
5770 PRINT "
5780 PRINT "
5790 PRINT "
5800 PRINT "
5810 PRINT "
5820 PRINT "
5830 PRINT "
5840 PRINT "
5850 PRINT "
5860 PRINT "
5870 PRINT "
5880 PRINT "
5890 PRINT "
5900 PRINT "
5910 PRINT "
5920 PRINT "
5930 PRINT "
5940 PRINT "
5950 PRINT "
5960 PRINT "
5970 PRINT "
5980 PRINT "
5990 PRINT "
6000 PRINT "
6010 PRINT "
6020 PRINT "
6030 PRINT "
6040 PRINT "
6050 PRINT "
6060 PRINT "
6070 PRINT "
6080 PRINT "
6090 PRINT "
6100 PRINT "
6110 PRINT "
6120 PRINT "
6130 PRINT "
6140 PRINT "
6150 PRINT "
6160 PRINT "
6170 PRINT "
6180 PRINT "
6190 PRINT "
6200 PRINT "
6210 PRINT "
6220 PRINT "
6230 PRINT "
6240 PRINT "
6250 PRINT "
6260 PRINT "
6270 PRINT "
6280 PRINT "
6290 PRINT "
6300 PRINT "
6310 PRINT "
6320 PRINT "
6330 PRINT "
6340 PRINT "
6350 PRINT "
6360 PRINT "
6370 PRINT "
6380 PRINT "
6390 PRINT "
6400 PRINT "
6410 PRINT "
6420 PRINT "
6430 PRINT "
6440 PRINT "
6450 PRINT "
6460 PRINT "
6470 PRINT "
6480 PRINT "
6490 PRINT "
6500 PRINT "
6510 PRINT "
6520 PRINT "
6530 PRINT "
6540 PRINT "
6550 PRINT "
6560 PRINT "
6570 PRINT "
6580 PRINT "
6590 PRINT "
6600 PRINT "
6610 PRINT "
6620 PRINT "
6630 PRINT "
6640 PRINT "
6650 PRINT "
6660 PRINT "
6670 PRINT "
6680 PRINT "
6690 PRINT "
6700 PRINT "
6710 PRINT "
6720 PRINT "
6730 PRINT "
6740 PRINT "
6750 PRINT "
6760 PRINT "
6770 PRINT "
6780 PRINT "
6790 PRINT "
6800 PRINT "
6810 PRINT "
6820 PRINT "
6830 PRINT "
6840 PRINT "
6850 PRINT "
6860 PRINT "
6870 PRINT "
6880 PRINT "
6890 PRINT "
6900 PRINT "
6910 PRINT "
6920 PRINT "
6930 PRINT "
6940 PRINT "
6950 PRINT "
6960 PRINT "
6970 PRINT "
6980 PRINT "
6990 PRINT "
7000 PRINT "
7010 PRINT "
7020 PRINT "
7030 PRINT "
7040 PRINT "
7050 PRINT "
7060 PRINT "
7070 PRINT "
7080 PRINT "
7090 PRINT "
7100 PRINT "
7110 PRINT "
7120 PRINT "
7130 PRINT "
7140 PRINT "
7150 PRINT "
7160 PRINT "
7170 PRINT "
7180 PRINT "
7190 PRINT "
7200 PRINT "
7210 PRINT "
7220 PRINT "
7230 PRINT "
7240 PRINT "
7250 PRINT "
7260 PRINT "
7270 PRINT "
7280 PRINT "
7290 PRINT "
7300 PRINT "
7310 PRINT "
7320 PRINT "
7330 PRINT "
7340 PRINT "
7350 PRINT "
7360 PRINT "
7370 PRINT "
7380 PRINT "
7390 PRINT "
7400 PRINT "
7410 PRINT "
7420 PRINT "
7430 PRINT "
7440 PRINT "
7450 PRINT "
7460 PRINT "
7470 PRINT "
7480 PRINT "
7490 PRINT "
7500 PRINT "
7510 PRINT "
7520 PRINT "
7530 PRINT "
7540 PRINT "
7550 PRINT "
7560 PRINT "
7570 PRINT "
7580 PRINT "
7590 PRINT "
7600 PRINT "
7610 PRINT "
7620 PRINT "
7630 PRINT "
7640 PRINT "
7650 PRINT "
7660 PRINT "
7670 PRINT "
7680 PRINT "
7690 PRINT "
7700 PRINT "
7710 PRINT "
7720 PRINT "
7730 PRINT "
7740 PRINT "
7750 PRINT "
7760 PRINT "
7770 PRINT "
7780 PRINT "
7790 PRINT "
7800 PRINT "
7810 PRINT "
7820 PRINT "
7830 PRINT "
7840 PRINT "
7850 PRINT "
7860 PRINT "
7870 PRINT "
7880 PRINT "
7890 PRINT "
7900 PRINT "
7910 PRINT "
7920 PRINT "
7930 PRINT "
7940 PRINT "
7950 PRINT "
7960 PRINT "
7970 PRINT "
7980 PRINT "
7990 PRINT "
8000 PRINT "
8010 PRINT "
8020 PRINT "
8030 PRINT "
8040 PRINT "
8050 PRINT "
8060 PRINT "
8070 PRINT "
8080 PRINT "
8090 PRINT "
8100 PRINT "
8110 PRINT "
8120 PRINT "
8130 PRINT "
8140 PRINT "
8150 PRINT "
8160 PRINT "
8170 PRINT "
8180 PRINT "
8190 PRINT "
8200 PRINT "
8210 PRINT "
8220 PRINT "
8230 PRINT "
8240 PRINT "
8250 PRINT "
8260 PRINT "
8270 PRINT "
8280 PRINT "
8290 PRINT "
8300 PRINT "
8310 PRINT "
8320 PRINT "
8330 PRINT "
8340 PRINT "
8350 PRINT "
8360 PRINT "
8370 PRINT "
8380 PRINT "
8390 PRINT "
8400 PRINT "
8410 PRINT "
8420 PRINT "
8430 PRINT "
8440 PRINT "
8450 PRINT "
8460 PRINT "
8470 PRINT "
8480 PRINT "
8490 PRINT "
8500 PRINT "
8510 PRINT "
8520 PRINT "
8530 PRINT "
8540 PRINT "
8550 PRINT "
8560 PRINT "
8570 PRINT "
8580 PRINT "
8590 PRINT "
8600 PRINT "
8610 PRINT "
8620 PRINT "
8630 PRINT "
8640 PRINT "
8650 PRINT "
8660 PRINT "
8670 PRINT "
8680 PRINT "
8690 PRINT "
8700 PRINT "
8710 PRINT "
8720 PRINT "
8730 PRINT "
8740 PRINT "
8750 PRINT "
8760 PRINT "
8770 PRINT "
8780 PRINT "
8790 PRINT "
8800 PRINT "
8810 PRINT "
8820 PRINT "
8830 PRINT "
8840 PRINT "
8850 PRINT "
8860 PRINT "
8870 PRINT "
8880 PRINT "
8890 PRINT "
8900 PRINT "
8910 PRINT "
8920 PRINT "
8930 PRINT "
8940 PRINT "
8950 PRINT "
8960 PRINT "
8970 PRINT "
8980 PRINT "
8990 PRINT "
9000 PRINT "
9010 PRINT "
9020 PRINT "
9030 PRINT "
9040 PRINT "
9050 PRINT "
9060 PRINT "
9070 PRINT "
9080 PRINT "
9090 PRINT "
9100 PRINT "
9110 PRINT "
9120 PRINT "
9130 PRINT "
9140 PRINT "
9150 PRINT "
9160 PRINT "
9170 PRINT "
9180 PRINT "
9190 PRINT "
9200 PRINT "
9210 PRINT "
9220 PRINT "
9230 PRINT "
9240 PRINT "
9250 PRINT "
9260 PRINT "
9270 PRINT "
9280 PRINT "
9290 PRINT "
9300 PRINT "
9310 PRINT "
9320 PRINT "
9330 PRINT "
9340 PRINT "
9350 PRINT "
9360 PRINT "
9370 PRINT "
9380 PRINT "
9390 PRINT "
9400 PRINT "
9410 PRINT "
9420 PRINT "
9430 PRINT "
9440 PRINT "
9450 PRINT "
9460 PRINT "
9470 PRINT "
9480 PRINT "
9490 PRINT "
9500 PRINT "
9510 PRINT "
9520 PRINT "
9530 PRINT "
9540 PRINT "
9550 PRINT "
9560 PRINT "
9570 PRINT "
9580 PRINT "
9590 PRINT "
9600 PRINT "
9610 PRINT "
9620 PRINT "
9630 PRINT "
9640 PRINT "
9650 PRINT "
9660 PRINT "
9670 PRINT "
9680 PRINT "
9690 PRINT "
9700 PRINT "
9710 PRINT "
9720 PRINT "
9730 PRINT "
9740 PRINT "
9750 PRINT "
9760 PRINT "
9770 PRINT "
9780 PRINT "
9790 PRINT "
9800 PRINT "
9810 PRINT "
9820 PRINT "
9830 PRINT "
9840 PRINT "
9850 PRINT "
9860 PRINT "
9870 PRINT "
9880 PRINT "
9890 PRINT "
9900 PRINT "
9910 PRINT "
9920 PRINT "
9930 PRINT "
9940 PRINT "
9950 PRINT "
9960 PRINT "
9970 PRINT "
9980 PRINT "
9990 PRINT "
10000 PRINT "
10010 PRINT "
10020 PRINT "
10030 PRINT "
10040 PRINT "
10050 PRINT "
10060 PRINT "
10070 PRINT "
10080 PRINT "
10090 PRINT "
10100 PRINT "
10110 PRINT "
10120 PRINT "
10130 PRINT "
10140 PRINT "
10150 PRINT "
10160 PRINT "
10170 PRINT "
10180 PRINT "
10190 PRINT "
10200 PRINT "
10210 PRINT "
10220 PRINT "
10230 PRINT "
10240 PRINT "
10250 PRINT "
10260 PRINT "
10270 PRINT "
10280 PRINT "
10290 PRINT "
10300 PRINT "
10310 PRINT "
10320 PRINT "
10330 PRINT "
10340 PRINT "
10350 PRINT "
10360 PRINT "
10370 PRINT "
10380 PRINT "
10390 PRINT "
10400 PRINT "
10410 PRINT "
10420 PRINT "
10430 PRINT "
10440 PRINT "
10450 PRINT "
10460 PRINT "
10470 PRINT "
10480 PRINT "
10490 PRINT "
10500 PRINT "
10510 PRINT "
10520 PRINT "
10530 PRINT "
10540 PRINT "
10550 PRINT "
10560 PRINT "
10570 PRINT "
10580 PRINT "
10590 PRINT "
10600 PRINT "
10610 PRINT "
10620 PRINT "
10630 PRINT "
10640 PRINT "
10650 PRINT "
10660 PRINT "
10670 PRINT "
10680 PRINT "
10690 PRINT "
10700 PRINT "
10710 PRINT "
10720 PRINT "
10730 PRINT "
10740 PRINT "
10750 PRINT "
10760 PRINT "
10770 PRINT "
10780 PRINT "
10790 PRINT "
10800 PRINT "
10810 PRINT "
10820 PRINT "
10830 PRINT "
10840 PRINT "
10850 PRINT "
10860 PRINT "
10870 PRINT "
10880 PRINT "
10890 PRINT "
10900 PRINT "
10910 PRINT "
10920 PRINT "
10930 PRINT "
10940 PRINT "
10950 PRINT "
10960 PRINT "
10970 PRINT "
10980 PRINT "
10990 PRINT "
11000 PRINT "
11010 PRINT "
11020 PRINT "
11030 PRINT "
11040 PRINT "
11050 PRINT "
11060 PRINT "
11070 PRINT "
11080 PRINT "
11090 PRINT "
11100 PRINT "
11110 PRINT "
11120 PRINT "
11130 PRINT "
11140 PRINT "
11150 PRINT "
11160 PRINT "
11170 PRINT "
11180 PRINT "
11190 PRINT "
11200 PRINT "
11210 PRINT "
11220 PRINT "
11230 PRINT "
11240 PRINT "
11250 PRINT "
11260 PRINT "
11270 PRINT "
11280 PRINT "
11290 PRINT "
11300 PRINT "
11310 PRINT "
11320 PRINT "
11330 PRINT "
11340 PRINT "
11350 PRINT "
11360 PRINT "
11370 PRINT "
11380 PRINT "
11390 PRINT "
11400 PRINT "
11410 PRINT "
11420 PRINT "
11430 PRINT "
11440 PRINT "
11450 PRINT "
11460 PRINT "
11470 PRINT "
11480 PRINT "
11490 PRINT "
11500 PRINT "
11510 PRINT "
11520 PRINT "
11530 PRINT "
11540 PRINT "
11550 PRINT "
11560 PRINT "
11570 PRINT "
11580 PRINT "
11590 PRINT "
11600 PRINT "
11610 PRINT "
11620 PRINT "
11630 PRINT "
11640 PRINT "
11650 PRINT "
11660 PRINT "
11670 PRINT "
11680 PRINT "
11690 PRINT "
11700 PRINT "
11710 PRINT "
11720 PRINT "
11730 PRINT "
11740 PRINT "
11750 PRINT "
11760 PRINT "
11770 PRINT "
11780 PRINT "
11790 PRINT "
11800 PRINT "
11810 PRINT "
11820 PRINT "
11830 PRINT "
11840 PRINT "
11850 PRINT "
11860 PRINT "
11870 PRINT "
11880 PRINT "
11890 PRINT "
11900 PRINT "
11910 PRINT "
11920 PRINT "
11930 PRINT "
11940 PRINT "
11950 PRINT "
11960 PRINT "
11970 PRINT "
11980 PRINT "
11990 PRINT "
12000 PRINT "
12010 PRINT "
12020 PRINT "
12030 PRINT "
12040 PRINT "
12050 PRINT "
12060 PRINT "
12070 PRINT "
12080 PRINT "
12090 PRINT "
12100 PRINT "
12110 PRINT "
12120 PRINT "
12130 PRINT "
12140 PRINT "
12150 PRINT "
12160 PRINT "
12170 PRINT "
12180 PRINT "
12190 PRINT "
12200 PRINT "
12210 PRINT "
12220 PRINT "
12230 PRINT "
12240 PRINT "
12250 PRINT "
12260 PRINT "
12270 PRINT "
12280 PRINT "
12290 PRINT "
12300 PRINT "
12310 PRINT "
12320 PRINT "
12330 PRINT "
12340 PRINT "
12350 PRINT "
12360 PRINT "
12370 PRINT "
12380 PRINT "
12390 PRINT "
12400 PRINT "
12410 PRINT "
12420 PRINT "
12430 PRINT "
12440 PRINT "
12450 PRINT "
12460 PRINT "
12470 PRINT "
12480 PRINT "
12490 PRINT "
12500 PRINT "
12510 PRINT "
12520 PRINT "
12530 PRINT "
12540 PRINT "
12550 PRINT "
12560 PRINT "
12570 PRINT "
12580 PRINT "
12590 PRINT "
12600 PRINT "
12610 PRINT "
12620 PRINT "
12630 PRINT "
12640 PRINT "
12650 PRINT "
12660 PRINT "
12670 PRINT "
12680 PRINT "
12690 PRINT "
12700 PRINT "
12710 PRINT "
12720 PRINT "
12730 PRINT "
12740 PRINT "
12750 PRINT "
12760 PRINT "
12770 PRINT "
12780 PRINT "
12790 PRINT "
12800 PRINT "
12810 PRINT "
12820 PRINT "
12830 PRINT "
12840 PRINT "
12850 PRINT "
12860 PRINT "
12870 PRINT "
12880 PRINT "
12890 PRINT "
12900 PRINT "
12910 PRINT "
12920 PRINT "
12930 PRINT "
12940 PRINT "
12950 PRINT "
12960 PRINT "
12970 PRINT "
12980 PRINT "
12990 PRINT "
13000 PRINT "
13010 PRINT "
13020 PRINT "
13030 PRINT "
13040 PRINT "
13050 PRINT "
13060 PRINT "
13070 PRINT "
13080 PRINT "
13090 PRINT "
13100 PRINT "
13110 PRINT "
13120 PRINT "
13130 PRINT "
13140 PRINT "
13150 PRINT "
13160 PRINT "
13170 PRINT "
13180 PRINT "
13190 PRINT "
13200 PRINT "
13210 PRINT "
13220 PRINT "
13230 PRINT "
13240 PRINT "
13250 PRINT "
13260 PRINT "
13270 PRINT "
13280 PRINT "
13290 PRINT "
13300 PRINT "
13310 PRINT "
13320 PRINT "
13330 PRINT "
13340 PRINT "
13350 PRINT "
13360 PRINT "
13370 PRINT "
13380 PRINT "
13390 PRINT "
13400 PRINT "
13410 PRINT "
13420 PRINT "
13430 PRINT "
13440 PRINT "
13450 PRINT "
13460 PRINT "
13470 PRINT "
13480 PRINT "
13490 PRINT "
13500 PRINT "
13510 PRINT "
13520 PRINT "
13530 PRINT "
13540 PRINT "
13550 PRINT "
13560 PRINT "
13570 PRINT "
13580 PRINT "
13590 PRINT "
13600 PRINT "
13610 PRINT "
13620 PRINT "
13630 PRINT "
13640 PRINT "
13650 PRINT "
13660 PRINT "
13670 PRINT "
13680 PRINT "
13690 PRINT "
13700 PRINT "
13710 PRINT "
13720 PRINT "
13730 PRINT "
13740 PRINT "
13750 PRINT "
13760 PRINT "
13770 PRINT "
13780 PRINT "
13790 PRINT "
13800 PRINT "
13810 PRINT "
13820 PRINT "
13830 PRINT "
13840 PRINT "
13850 PRINT "
13860 PRINT "
13870 PRINT "
13880 PRINT "
13890 PRINT "
13900 PRINT "
13910 PRINT "
13920 PRINT "
13930 PRINT "
13940 PRINT "
13950 PRINT "
13960 PRINT "
13970 PRINT "
13980 PRINT "
13990 PRINT "
14000 PRINT "
14010 PRINT "
14020 PRINT "
14030 PRINT "
14040 PRINT "
14050 PRINT "
14060 PRINT "
14070 PRINT "
14080 PRINT "
14090 PRINT "
14100 PRINT "
14110 PRINT "
14120 PRINT "
14130 PRINT "
14140 PRINT "
14150 PRINT "
14160 PRINT "
14170 PRINT "
14180 PRINT "
14190 PRINT "
14200 PRINT "
14210 PRINT "
14220 PRINT "
14230 PRINT "
14240 PRINT "
14250 PRINT "
14260 PRINT "
14270 PRINT "
14280 PRINT "
14290 PRINT "
14300 PRINT "
14310 PRINT "
14320 PRINT "
14330 PRINT "
14340 PRINT "
14350
```

from page 24

children, or people of limited experience, I decided to make it auto-running, so it is saved using Save "STITCH" Line 1. The program will execute itself when it has finished loading, and go straight to the instructions. This method is useful on two counts — firstly, it makes it easier for inexperienced users, and secondly, if you hold any information in variables or arrays, they are not lost accidentally by using Run.

When information is displayed on the screen, it is impossible to know how long the user will take to read and assimilate the display. It is clearly then, an unwise decision to specify a particular length of time to hold the display. All that is necessary is a line such as:—

INPUT "Press RETURN to continue": 25

The last module, the repeat option, could be included in the main program but makes more sense as a separate module. Instructions for key pressing should be specific rather than general, ie it is better to say "Press 'Y' to continue" than to say "Press any key" (on the Spectrum, as well as many other machines, it is necessary to check for a lower case "y" as well as the upper case).

It can be seen in the listing that I have included the opportunity to Stop the program at this stage. There is nothing more infuriating than discovering that the only way to escape is to pull out the mains plug.



The program is now almost finished (sighs of relief), and a check through the listing should show how the flow of control operates. The final touches are a title at the beginning and an author/date line. Note that all Rem statements are nested between empty Rem lines, eg:

```
10 REM
20 REM "CURVE STITCHING"
30 REM
```

This does nothing more than to make the modules stand out.

If you are interested in encouraging good programming practice or hope to go on to more structured languages, like Pascal, Comal or even BBC Basic, you will find the leap into the unknown less painful by adopting a more systematic approach. Since Dijkstra's famous article, "Goto statement considered harmful", back in 1968, many people have commented on their over-use in Basic — OK so the program works, but can you still see why a month later?

You may disagree with much that I have written, but I hope it will make you think next time you consider writing a program.

Generating coded ends

We call this the *standard ending*. So we might as well make the program generate this code at the end of the routine automatically. Here's the loader in its simplest form (in 1K you can save memory by shortening the Print phrases):

```
10 PRINT "BASE ADDRESS: ";
20 INPUT B
30 PRINT B
40 PRINT "NO. OF DATA BYTES: ";
50 INPUT D
60 PRINT D
70 FOR I = 0 TO D - 1
80 POKE B + I, 0
90 NEXT I
100 LET A = B + D
110 PRINT "CODE:"
120 INPUT C
130 IF C < 0 THEN GOTO 180
140 PRINT C
150 POKE A, C
160 LET A = A + 1
170 GOTO 120
180 CLS
190 FOR I = 1 TO 9
200 POKE I - 1 + A, M(I)
210 NEXT I
```

The last three lines assume that the array M has been set up in command mode (ie without line numbers) by:

```
DIM M(9)
LET M(1) = 62
LET M(2) = 30
LET M(3) = 237
LET M(4) = 71
LET M(5) = 253
LET M(6) = 33
LET M(7) = 0
LET M(8) = 64
LET M(9) = 201
```

These are the standard "end of routine" codes mentioned earlier.

Or, you could input these values into M using a For loop, and then delete the loop before saving. Either way, do not forget to execute the program with Goto 10 and not Run, so that the array values are preserved.

Now, execute the program:

```
220 LET Y = USR(B + 1)
```

The Y value returned by Usr isn't usually needed, but it has to be there to satisfy the

syntax of the statement. It actually contains whatever was in the Bc register pair on returning from the machine code routine.

Finally, we look at the state of the program and its data:

```
230 FOR I = B TO A + 8
240 PRINT I, PEEK I
250 NEXT I
```

Now, to run the program. Firstly, the machine code routine has to coexist with the Basic system. If we're careless, Basic will clobber our defenceless little routine, because it's always moving things around in memory.

One way out of this problem is to fool Basic into thinking that the top of memory is below where it really is, and use the resulting "attic" for any programs we want preserved. To do this, Poke the bytes 16388 and 16389 (which together form a system variable called Ramtop) with the address from which we wish to start our program. In other words, this is the first address which is unavailable to Basic. As usual, the low byte contains the least significant value.

So, taking an example for a 1K machine, Ramtop contains the hex value 4400 to start with. If we want to allocate a 256 (decimal) byte attic, we have to set Ramtop to 4300:

```
POKE 16388, 0      [ = 00 hex ]
POKE 16389, 67     [ = 43 hex ]
```

Incidentally, 4300 hex = 17152 decimal, and you can omit the Poke 16388 unless, for some reason, you've changed it from its usual 0 value previously.

Now we type New because Basic only notices that Ramtop has changed when new is executed. Next, load the "loader" program and run it. In response to its base address request, type 17152, and, to No. of data bytes, type 1. Finally, key in the machine code (62, 4, 6, 7 etc) terminating with a negative value — a delimiter that is ignored on loading but signalling "end of code listing".

The system responds by printing the contents of bytes from 17152 onwards. In 17152 is 11, which is the sum of 4 and 7. This should not be surprising, since that is where we asked to store the result, and it's also the byte we allocated for data. The rest of the "memory dump" just confirms that the program is correctly stored.

Experiment, by altering the values being added (just Poke new values into 17154 and 17156 and goto 220). Alternatively put the result somewhere else — say 17153. See how it changes the program?

If you have any machine code sub-routines/tips/games, please send them to: Machine Code, Popular Computing Weekly, Hobhouse Court, 19 Whitcomb Street, London WC2 7HF.

Reproduced from Machine Code and better Basic, by Ian Stewart and Robin Jones (price £7.50), by kind permission of Shiva Publishing Ltd, 4 Church Lane, Nantwich, Cheshire CW5 5RQ.



Temperament and the Dragon

Simon Owen looks at the pros and cons of being a Dragon owner.

This article is mainly dedicated to all those people who, like myself, spent hours hunched over that little black box — namely the ZX81, and who now own or are thinking of becoming owners of that miraculous, if slightly temperamental creature — the Dragon 32.

Oh, what a lovely sight that Dragon is, too. A real keyboard at last. Much more thumping of the dead 'touch sensitive' one on the ZX81 and I would have had no finger ends left. The high resolution graphics are super as well after those chunky 64 x 32 things.

But — and it is a very large but at that — the manual, which claims to be comprehensive, certainly does not live up to its promise. It is not a patch on the Sinclair one which is witty and very useful. A first-time user would have a lot of difficulty making the machine do anything at all. As it is, it took me ages to make any sense of it.

A week and a half and nearly a head of hair later, I read that this new animal of mine is really a well-known colour computer in Dragon's clothing. With this information ringing in my brain I begged the money from Mum and off I dashed, hot-foot, to the High Street to buy 'their' manual. I arrived home triumphant with this book, which at £3.95 was great value, almost as good as the ZX81's. It covers in detail (a word I do not think the people at Dragon Data know) all the graphic and some of the string functions, except for two which still have me baffled — *Get* and *Put*.

The first difference between our dear old B's and the Dragon becomes obvious the minute you turn it on — the screen is smaller than we eighty-oners are used to. Another difference, and quite a good one (I think), is the *Print* command instead of good old *X* and *Y*.

When listing a long program the screen size can be a nuisance. You have to be very quick to stop the listing going off the top of the screen. However, the *Renum* command is great. All that time spent editing line numbers, etc. can now be done in a second. I had great fun with that one. The *Edit* command, which is a bit daunting at first (and which seems to have foiled several reviewers), can be very useful and time-saving once you get the hang of it. And it is much more comprehensive than the edit capability of the ZX81.

The colour commands, which, incidentally, I found quite hard to handle, have one large drawback. The screen text can only be black on green or vice-versa.

Although the screen can be *Cis-ed* any colour, the text reverts back to black and green (at least it does for me — any advice to make it otherwise would be welcome). Also, if you use a black and white television, as I have to most of the time, the colours, which should show up as graduated shades of grey — don't.

The only other major gripe I have about the Dragon has to do with the way that the character set is laid out. Although there are approximately the same number of pixel characters as on the ZX81, they are reproduced eight times — each in a different colour. This space could have been used for much more useful things, user-defined characters or pre-defined high-res graphics, to name but two. Also, the fact that these characters are not available through the keyboard but only by using *Chr* makes programs considerably longer if you are using a lot of low-res graphics.

On the plus side is the fact that all the Dragon commands are amazingly fast compared with the time things take on the ZX81. Even the graphics commands *Line* and *Draw* are almost instantaneous and the circle command is superior to the equivalent on many of the more expensive micros.

Dragon Data's software is not as good as I thought it was going to be. There is not

much of it, and what there is does not seem to exploit the machine as well as it could. If you do not have any joysticks there is at least one of their programs you cannot use, but it does not tell you this anywhere on the outside of the packaging. The price of the software seems high at £7.95 when you consider some of the really excellent ZX81 tapes for under a fiver.

Although I seem to be criticising my Dragon a lot, I am being a bit unfair. The Dragon 32, with its 6809 microprocessor, is a totally different type of computer to the ZX81 and most of my moans are more to do with this fact and my own inexperience than from any fault in the machine. The opinion of others far wiser than myself seem to bear out my original impression that the Dragon really is a wonderfully powerful machine with terrific potential. When other enthusiasts and the software houses discover the Dragon there will be ample information and lots of games to play. When this happens I am sure that our Dragons will really prove their worth.

Below are two small 'sample' programs to amuse you. The first produces circular patterns using height/width ratio in conjunction with a *For-next* loop. The second uses the *Line* command to produce everlasting patterns — be warned, this is quite hypnotic!

```

5 REM OVALS
10 CLS
20 INPUT "INCREMENT STEP (1-9)";A
30 INPUT "A NUMBER BETWEEN 1 & 3(DECIMALS TOO)";B
40 PMODE4:PCLS:SCREEN 1,1
50 FOR X=1 TO 90 STEP A
60 CIRCLE (128,96),X,,B
70 NEXT X
80 AS=INKEY$:IF AS=""THEN B#
90 GOTO 10

1 REM PATTERNS
2
3 PMODE 3,1
10 PCLS3
15 SCREEN 1,1
20 FOR I=3 TO 7
25 FOR J=2 TO 6
30 FOR S=0 TO 3
35 FOR R=0 TO 3
40 COLOR R,S
45 A=B*255:C=B*D=191
50 LINE (A,C)-(B,D),PSET,B
55 A=A+J:B=B-J:C=C+I:D=D-I
60 IF A<255 AND C<191 THEN S#
65 NEXT R
70 NEXT S
75 NEXT J,I
80 GOTO 30
    
```

Is there anything about your computer you don't understand, and which everyone else seems to take for granted? Whatever your problem **Peek** it to Ian Beardmore and every week he will **Poke** back as many answers as he can. The address is **Peek & Poke, PCW, Hobhouse Court, 19 Whitcomb Street, London WC2 7HF.**

INTERROGATION ENGLISH STYLE

R Watson of Washington, Tyne and Wear, writes:

Q Do you know of any way which tokenised line numbers and commands in the BBC model B program can be converted into English for interrogation and edit aid?

A This can be done if you load the accumulator with the token that you want to be printed. When this is done call the address B53A (hex). The computer will decipher the token into Ascii and then print out the Ascii.

ACE GOES BACK TO SCHOOL

Joe Laine of Yew Road, Stockport, writes:

Q I am very interested in the new Jupiter Ace, but I am unsure whether or not to buy it. I was going to get a ZX81 or Spectrum to learn on, because I am going to start learning computing at school soon. What I want to know is, will I have to learn two languages, one at school and one on a Jupiter Ace? Also will there be software coming out for the Ace? I do not want to buy a computer that has no software.

A The Jupiter Ace has caused quite a lot of interest, and not a small amount of decision taking. It is not an easy choice to make if you want to buy a computer, even if you do believe that Forth is a better language than Basic.

What you say about school is very important. I know that last year the London Board specified any high level language for the O-level, but only Basic for the A-level. This year the AEB has not specified Basic only. The thing to do in this case is to talk with your teachers, find out what the syllabus asks and what they are going to teach. While an increasing number of staff are becoming computer literate, I doubt if many of them are conversant with Forth.

I feel that it is a very good choice for a second machine. As to whether you should make it your first choice — I would again suggest you talk to your teachers before deciding.

BASTARDISING BASIC

D G Collow of Hamilton Crescent, Brentwood, Essex, writes:

Q I hope that your series on machine code is going to be as helpful as it looks. I wonder if you could clear up the following points for me.

- Why do authors attach so much importance to safeguarding machine code by placing it in a Rem statement, or above Ramtop? After all, I am not going to press New until I have finished with the program.
- Why is a machine code program so often supplemented by a Basic program. Why cannot the whole program be written in machine code?
- Why is it that, having loaded a machine code program, a Basic program then disappears?
- Machine code is typically Run by a Rand Usr address, but why on earth is Randomize necessary?
- With all due respect to Messrs Stewart and Jones, why do you write a program in Hex, when as part of the Loading process it is converted to decimal. Why not write the program in decimal in the first place?

A The reason machine code is placed in either a Rem statement, or above Ramtop, is that the memory locations within a program move. As new information is put in or changed, the addresses of the various items within the program change as well. This does not really matter in the execution of a straightforward program. But, when there is a machine code

routine to be called, the computer must know where it is. The first line of a program, or the space above Ramtop are fixed, and therefore safe places to store such a routine.

When you switch on a computer, the Rom takes over and offers you control. Because the Rom is in Basic, the control is in Basic. On the ZX81 machine code can only be 'entered' by commands from the Basic. The second reason for mixing machine code with Basic is that machine code is a lot harder to debug. So, there is often an element of compromise, as it makes fault finding so much easier to identify and correct.

When you use the Usr command it also clears the screen. This is why your basic will disappear.

Rand is used because it is a one byte command and relatively harmless in that all it does is to reset the seed generator. Because of the way the ZX81 is configured, Usr cannot be called on its own. Print could be used, except that it will clear the screen when used with Usr, which might not be wanted. Poke can also be used, but that starts changing locations. Rand is safe and uses the minimum of memory.

The reason that hex is used so often is that it is much simpler. All the addresses from 0 to 65535 can be represented in hex by just four characters. It is also much easier for a computer to convert hex to binary, and vice versa, than it is to convert either of those two to denary.

It is a legacy from the days when computers only had a hex keypad, because of space restrictions (who remembers the Sinclair Mk 14, complete with 256 bytes of Ram and delivery problems?). Also, because there are fewer digits to input, it is quicker to input hex.

COMMON CADS UP MARKET

Paul Mottram of Brompton, London, SW5, writes:

Q I have seen written down sometimes the words CAD and CAM. I'm sure that they are initials for something but cannot work out what. Can you tell me.

A CAD is Computer Aided Design, and CAM is

Computer Aided Management. They are words that are very common further up the business end of the market. The most famous examples of CAD are the framework graphics that can be rotated in all directions, whilst maintaining their true perspective.

CAM is more concerned with financial analysis, long-term planning and marketing. Indeed, it would cover most of the work that is dealt with by middle and senior management.

SWITCHING OUT ON MEMORY

Tony De Souza of Elspeth Road, London SW11, writes:

Q After reading your answer in the September 23 issue, about the 80K extension for the Spectrum, I thought I had my questions answered. However, a couple of extra questions have come to mind.

Can I retain the memory that is switched out? And can other hardware still be used, or will it interfere with the expansion? Would it be possible to review the expansion?

Also my Spectrum has a Nand gate wired in, presumably to clear up a problem. Can you tell me what that bug is or was?

A You can retain the memory of the 'switched out' 32K. There is no interference as such from the board as it is an internal fitting. However, the board does have two Leds that stick out the back. I doubt they will stick out enough to interfere with anything that is interfaced to the user port.

The problem that does seem to have occurred is with the actual amount of memory that is switched out. This is done in two 32K blocks, which are somewhat large. Also it means that when you switch out a block your variables and display file go with it. It would seem that some software for downloading the files from the top of the memory to the bottom is needed. I do not at the moment know if this is being done.

As to your last point, if you look at issues 6 and 9 of *Popular Computing Weekly* you will find out that in the original Spectrum pcbs, there was a shared data bus that caused a lot of problems.

Classified



NEW GENERATION SOFTWARE

from the author of
3D MONSTER MAZE
and **3D DEFENDER**
for the ZX81 comes a game for the 16K

SPECTRUM

ESCAPE — Can you escape from the maze inhabited by five dinosaurs including a TRICERATOPS, who hides behind the hedges and a PTERODACTYL, who soars over the maze to swoop down on you?

Please send £4.95 to
NEW GENERATION SOFTWARE (Dept PCW)
FREEPOST (no stamp required)
OLDLAND COMMON, BRISTOL BS15 0BR

A NEW RETAILER for Sinclair accessories in the North of England. We are situated near the M1 and M62 motorways. As well as a complete range of hard and software, our service department can repair, modify or fit a wide range of accessories. Hours of business 10 am — 8 pm, Monday to Saturday inclusive.

TELEPHONE PHILIP COPELY ON
0674 272545
PLEASE RING FOR DETAILS OF OUR MAIL ORDER SERVICE

ZX SIMULSOLVE — efficient solution to simultaneous linear equations with many unknowns. Details: see cassette ZX81 24, Spectrum £4.95. Alan Turnbull, 85 Vinegar Road, Stockport SK3 8HL.

SPECTRUM SOFTWARE. Why buy rubbish? Send for details first! (See appreciated.) "Softbox". 24 Sydenham Buildings, Bath, Avon.

SPECTRUM/BBC. Booklets 50 for text, graphics, USR character planning. Only £1 From A. Qureshi, The Yew, Colmar, Shropshire.

M2-80K, M2-80A SOFTWARE. Business, games, utilities. See DCS 38 South Parade, Bramhall, Stockport.

BBC SOFTWARE: Super Hangman, 400 words, colour graphics, sound, etc. Cave-Trail Adventure and Testcard utility. All three for £5 inc. SRI Software, 80 Gravesend Road, Strood, Kent.

DKTRONICS 32K PLUG-IN RAM for the original version of 16K Spectrum (No good for latest c/board design.) £27.60. Tel: Mr Wilson 01-863 4304 evenings only.

UNEXPANDED VIC20's. An exciting addictive m/c arcade game. Galaxion Invaders, incredible colour graphics and sound. Full features including Bill Score, Swooping Invaders, Multi-Play, Bonus Ship. Cassette £5.95 J. H. Shay, 51 Meadowcroft, Radcliffe, Manchester.

50 PER CENT ROYALTIES PAID: Vic20/Atom. See details/catalogue. C. P. White, 100 Uxbridge Road, Hanwell W7 3SC.

SPECTRUM GAMES, Munchman, Qthello, Monsteraade, Zombies and more. All for £3.95. A. Shaw, 8 Yeodan Drive, Southwam, Halifax, W. Yorks HX3 9DX.

16K ZX81 GAMES. Space Invaders, Pilot, Packman, Frogger, on one high quality cassette only £5. P. Sands, 25 Corsewall Street, Coalbridge ML5 1PX.

DEALER ENQUIRIES INVITED. ZX81 word processor superior to published listings. Editing, fast screen printing, Lprint. Not crashing M/C security lock for confidential text. Fully C/P. Royalties required. Write: C. Beddingfield, Brook House, Five Ways, Neston, South Wirral L64 7TW, England.

WHAT IS THE

AXON GROUP?

WHY NOT JOIN US?

SEE 25th NOVEMBER
ISSUE OF
POPULAR
COMPUTING WEEKLY

BBC MICRO SOFTWARE ARCADE STYLE GAMES (32K)

Delicious! Classic maze chase, uses keyboard or joystick. £5.45.

City Defend. Protect your cities against psychics £4.95.

Both including full instructions.

Order 20 to

M.B.D. SOFTWARE SUPPORT LTD
53 BARLEY CROFT
HARLOW, ESSEX

VIC20, cassette deck, printer, cartridges 16K, prog-dup chip, 3K, super expander, adventureland, the Count, Sargon chess, Avenger Cassettes, Bomb BA/Defenda, Intro tape, Mylestone Island, Vicmen, Panic, Starquest, Missile command, 3 Games Books. Programmers reference Guide VIC Revealed. VIC Programming 6 VIC Computing mags. All excellent condition, cost £800, sell £600. Tel: Dunstable 82817, Nick (after 6 pm).

SPECTRUM REMEMBER. Instantly remembers 80 or part 80 program. All Gotos, Gosubs, etc. included. The first and probably the best in M/C for only £3.95. David Webb, Southolme, 9 Park Road, Woking, Surrey.

SPECTRUM SOFTWARE: ZXtext, Teletext simulation for 48K (60 pages), 32K (34 pages), or 16K (24 pages). Spectrum Full simulation including colour, flashing, 24-hour clock, alarm, save/verify/load with auto-run, graphics and text freely mixed, etc. Cassette with full instructions, £5. Details (see) Ian Stewart, 17 Torry Drive, Alva, Scotland FK12 5NQ.

T199/4A software on tape, on £1.95. Send s.a.e. for list. ATL 115 Crescent Drive South Brighton, BN2 6SB.

WANTED: ZX81 programs on genuine tape, please send listing and price offer to: C. Holm, 15 Bishops Close, Walthamstow, London E17.

UNEXPANDED VIC20 GAME, cassette, Maze Chaser, you are in hot pursuit of two crooks in a random maze, good colour and sound. Send £2.50. Gary Hardwicke, 21 Bracken-Brogh, Brimsdown, Northampton.

SELLING YOUR ZX81? Then I will be most interested in buying your unwanted software. Please send details of tapes you need to sell for realistic cash offer to: Mr C. Kirkland, 7 Obndge Close, Taunton, Somerset. No traders please.

DUST COVERS for all computers, printers, disk drives, monitors etc. VicBBC Atom £2.95. Sharp M2 80K M2 8JA £5.50. Gene TRS80 £3.95. Printers £3.95. Please ring for other prices. Trade enquiries welcome. Access Barclaycard cheque. Sherbourne Designs, 9 Leighton Home Farm, Wellhead Lane, Westbury, Wiltshire. Tel: 0373823764.

WIN THE POOLS?

NOW AVAILABLE

SPECT-A-DRAW

A 48K SPECTRUM VERSION OF THE WELL KNOWN COMPUT-A-DRAW POOLS PREDICTION PROGRAM. The program looks at the recent form of teams playing in the League matches and then refers to a large database to see what happened in the past when teams with similar form met. Programs with instructions... £4.95
Database tape (optional, but holds data on over 5,000 matches)... £15.50
Program and database... £17.50
Or SAE for details to: S. McALLEY, 70 HEDGERLEY, CHIMBON, OXON OX8 4TJ.

DRAGON 32 FAMILY PROGRAMS

Full length original games, home and education programs on cassette, exploring computer range of graphics, memory colour and sound, with full documentation including Quiz Times, Addops, Battle Maths, Ringo, Sarah and Finance.

Send cheque PO for £5 to Shards Software, 19 Park Vale Court, Yms Way, Benthall, Essex CM14 4UR.

BBC (32K)

Guaranteed programmes for home and school. METRICS — the long revision programs covering decimal, length, capacity, mass, volume. All on one tape for £3.95. SAE for details to: complete list: CHALKBOFF, Lowman Cottage, Teandale, WEL- LINGTON, Somerset, TA21 0AL.

VIC20 (8.5K)

Guaranteed programmes for home and school. METRICS — the long revision programs covering decimal, length, capacity, mass, volume. All on one tape for £3.95. SAE for details to: complete list: CHALKBOFF, Lowman Cottage, Teandale, WEL- LINGTON, Somerset, TA21 0AL.

EXCITING ADVENTURE for expanded Spectrum. £10 prize for first solution. Acts as a master for a range of adventures (in £1.50). Just £3.50 for first hundred orders. Russel Software, 51 Copperbeech Drive, Wombourne, W. Mids.

New book for Spectrum

The Working Spectrum

A library of practical subroutines and programs.

By David Lawrence

Only £5.95 inc. p&h

This is the first book for the Spectrum to take you beyond the manual.

David Lawrence develops a collection of sophisticated yet practical programmes and games from reusable subroutines.

If you want to make the most of your Spectrum you must have this book.

Published in association with Popular Computing Weekly.

Send cheque/postal orders, for £5.95, to The Working Spectrum, Sunshine Books, Hobhouse Court, 19 Whitcomb Street, London WC2 2TH.

Please allow 28 days for delivery.

1K IS NOT ENOUGH!

A 2K ZX81 gives about 3 or 4 times the program area compared to a 1K. If you are running out of memory this is the cheap answer.

Send form for chip plus instructions. Most ZX81's need only a chip swap and one link soldered — a ten minute job. Some early ZX81's had 240K RAM chips instead of 128K. These move more awkwardly. If you think you have one of these, please specify!

T.E.C., 23 Dafford Court, Hottelwood, Telford, Shrop.

16K SPECTRUM programmes wanted of exceptional quality for early marketing. High royalties paid. Educational tapes welcome. Cassettes to MICRO-JUICE, 46 Angar Road, London NW3.

Computer Swap 01-930 3266

Free readers entries to buy or sell a computer.
Ring 01-930 3266 and give us the details.

Spectrums for sale

SINCLAIR SPECTRUM 16K plus one software cassette, brand new. £115. Tel: 0753 851508.

ZX81s for sale

ZX81 16K with D.K. Tronics cased keyboard. 4K graphics rom, software included. Character generator plus 2K ram, £150. Tel: Norwich 611122 extn 5008, Mr Palmer.

ZX81, Sinclair built, 4 books, tape, £35 on Mr Gibbons. Tel: Shipley (0274) 875407.

ZX80 FOR SALE. £20 one also 1K ZX81 wanted. Tel: Bideford 78732 for further information after 4 pm.

16K, ZX81 plus three commercial cassettes, ICL "How to Program ZX81". £50. Tel: Crowborough (089 26) 61872.

SINCLAIR-BUILT ZX81 1K, complete plus book of programs, 9 months old, £29. Buyer collects. Pudsey 566133.

ZX81 16K, beginner books and software, games and education, cost £130, accept £80. Tel: Nottingham 964592.

ZX81 16K RAM, leads and manual, lots of books and magazines, over £50 of software, still under guarantee, yours for only £90. Tel: 041-638 6677 (evenings).

ZX81, 1K, Sinclair-built, 2 books and magazine, £40. J. Hart, 118 Dalton Street, St Helens, Merseyside WA10 4NZ.

ZX81, 16K SINCLAIR, user port, manual, £50 of software, £75 one. Paul Goodwin. Tel: Hailley (02934) 5091.

SINCLAIR-BUILT ZX81, 4K Ram, D.K. Tronics Graphics Generator, home-made joystick, manual, leads, power supply, etc, £75 one. Tel: 081-865 7503.

ZX81 16K, plus software and magazines, £60. Phone Farnborough (Hants) (0252) 545294.

ZX81 16K Sinclair-built, still under guarantee and in box, excellent condition. Also software £70. For details telephone (041) 944 1483.

ZX81 WITH MEMOTECH 48K RAM, with £45 of books and software, £100. Tel: Wolverhampton 751392.

ZX81 WITH 16K FULLER EXTENDED KEYBOARD, with case, Monolith cassette recorder, manuals, 17 software cassettes, £130 one. Tel: 01-850 0567 (eves only).

ZX81 16K RAMPAC, plus software, £55 Tel: Bungay 4463.

SINCLAIR-BUILT ZX81, plus 16K Rampac, best software including 3D Defender, Scramble, 3D Monster Maze, etc, plus cassette recorder. £75 one. Tel: Epsom 40468 (after 5 pm).

ZX81, 16K including £150 of software, good condition, with books and magazines. £85. Tel: Bradford on Avon 3537.

ZX81 16K with video converter, on cased keyboard, video port, software and books, worth over £300, all for £80. Tel: 01-373 8514.

ZX81 (BOXED) 16K RAM, printer, leads, instructions, software, three rolls of paper, graphics programming books, £110. Will deliver, will split. Tel: 01-642 8654 after 7 pm.

SINCLAIR ZX81, 1K boxed with all leads and manuals, and guarantee. £40. Tel: Bognor (0243) 823351.

Commodores for sale

VIC20 12K RAM + high res + super expander + joystick + £30 software + manual + five copies of Vic Computing. £240. Mr. Cuenca 0278-61435.

VIC20 + disc drive + super expander + two cartridge games + VIC Revealed and other software. £450.00. Tel: Horley, Surrey 3025.

WILL SWAP VIC20 Scott Adams Voodoo Adventure for any other Adventure, Sargon or Star Battle. Tel: 01-954 4548.

VIC20, Data cassette, Super Lander, Superlot and Data Race cartridges. £180.00. Mr E. O. Doherty, Hoddeston (01) 66051 (evening).

VIC20 CASSETTE DECK, 8in monitor, 23K Ram, light pen joystick, lots of Rom base software, all worth £550, will accept £375. Tel: 01-981 7158 (eves).

VIC20 with cassette, excellent condition, one month guarantee, Star Battle cartridge, Galaxians, 2 Bug Bie cassettes, Pacman and Asteroids and other programs, £150. Tel: 01-450 8667 (evenings).

VIC20, C2N cassette deck, programs and cartridge and joystick, also books, mags and software (Scramble, Amok, Vicman), worth £300, want £200. Tel: M. Lucas, 01-274 6357.

VIC20 with data cassette, super expander, programmers aid cartridge, Vic Revealed, programmers ref guide, plus other manuals. Joystick, Vicman and magazines, £290.00. Tel: 01-629 6041.

VIC20, 9 months old, data cassette, computer manual, for £250, will accept £140, for quick sale. Tel: 01-856 6587.

VIC20, 3K super expander, 8K plus 3 expansion slots, joystick, 2 Rom cart, 8 software cassettes, programmers reference guide, boxed, 8 months old, £180.00. Tel: Julian 0908 662626.

VIC20 with cassette deck, joystick, cartridge, few software, still under guarantee. £200. Tel: Boston 643569 after 4 pm.

PET 32K, large keys, new Roms plus cassette, with software including Asteroids and Car-Race, £360. David Klugmann 01-940 2254.

VIC20 AND CASSETTE DECK, super expander, Spiders and Mars, Rat Race, joystick, lots of software, books and magazines, etc. Worth £350, want £245. Tel: Newton 0582 54783.

COMMODORE VIC 20, still under guarantee, £130. Tel: 01-571 5567 (weekends only).

VIC20 WITH CASSETTE with guarantee in perfect working order. £170. Tel: 061-788 4120.

COMMODORE PET 2001 with dual disc drives and one disk 32K RAM. Offers under £700. Tel: Sunbury-on-Thames 81767. Preferably evenings.

VIC20 16K Expansion, Dataset, joystick, introduction to basic, VIC revealed, many games, 50 magazines, immaculate. £300. Tel: Romford 47993, evenings.

VIC20 WITH CASSETTE DECK, 3K high Res RAM, Pacman cartridge, Blitz cassette intro to basic, and software, £200. V. Young Tel: 01-405 9123.

VIC20 plus cassette recorder, in original packing, under guarantee, joystick, dust covers, programmes, Ref manual, £60, software including Othello, Pacman, £200.00. Tel: 0602 201321.

VIC20 plus cassette deck 3K RAM cartridge, machine language monitor, various Arcade games on cassette and cartridges, all VIC books and courses. Free programmable calculator if you buy the lot (You name once) Tel: 01-882 0063 (evenings after 5 pm).

Acorns for sale

BBC MODEL A with 32K ram, analogue/digital converter and joysticks plus software. £300. Tel: (041) Glasgow 6323284.

ACORN ATOM 12K plus 12K, power supply, floating point Rom, cassette deck, manual, leads, software, 6 months old, must sell, emigrating, £150 or reasonable offer. Tel: 01-459 6133 (evenings/weekends).

BBC MODEL B, £360. Tel: 01-399 6584 (evenings only).

ACORN ATOM, 12K RAM + 16 ROM, floating point and toolbox, ROM, PSU, £200.00. S/W £225.00. T. Oulton. 01-360 0323 (Anytime).

BBC MODEL B including £60 of books and software, condition as new £400. Midsummer Norton 416245, evenings.

ACORN ATOM, cassette deck, 12K Ram, 4K Rom — including floating point, much software and manual, price £150. Ring Craig on Ripley 872182.

For sale

SHARP PC 1211 - printer, in fancy carrying case. PC 1211 has been adapted for optional use with a mains unit, all manuals £95.00. Tel: Chris after 6 pm, 01-363 9764 (Enfield, Middx.).

ZX PRINTER, as new, complete with five extra rolls of paper — still boxed with guarantee. Would cost £72, but sell for £55. Tel: 01-272 3319 (eves).

BOYCE CHESS CHALLENGER, 10 levels, 50 words vocabulary, 64 one-program games, £85.00. Tel: 01-979 4432.

NEWBRAN, 32K, beginners manual plus cassette and owners manual cassette and printer leads. £230.00. Contact: Brian McAlister, 53 Worsley Road, Freshbrook, Swindon, Wilts.

ATARI VIDEO COMPUTER plus combat cartridge and two sets of controllers. £85. Christopher Dulsan, 60 Mill Hill Lane, Pnolecraft WFB 4JQ. Tel: 794562.

ATARI VCS DEFENDER CARTRIDGE, bought in error, brand new. £23. Tel: 01-589 0501.

ATARI TV GAMES SYSTEM with Combat and Space Invader cartridges, very good condition. £80.00. Tel: Hitting 50528, Dean.

UK101, 8K, cased, Cegmon, Basic-5, sound plus, in-out board, joystick and interface, improved display, lots of software, manuals, etc. £175. swap W.H.Y. Mr M. A. Saunders, 7 Drumcliff Road, Thumby Lodge, Leicester LE5 2LH.

VIC 1515 PRINTER, new, never used, make me an offer. Tel: Chapstow 5058, evenings.

ZX81 THURNALL NO PORT, ready built, £9.8K Sinclair, Basic Rom, £10. ZX81 books, cassette, programs. Pyatt, 23 Arundel Drive, Orpington, Kent. Tel: Orpington 20281.

ATARI 800 48K, disk drive, recorder, Space Invaders, Missile Command, and Star Raiders Microsoft Basic on disk, plus various software on disk and tape, £800.00. Tel: 572 2917 (will separate or part exchange for ZX81).

DRAGON 32 MICRO, as new with all leads, manuals and some software, £180. Tel: Walton on Thames 26354.

VDU MODEL 550, Perkin Elmer RS 232 users and maintenance manuals available, £150. Dave, Billericay Essex. 02774 25892.

ATARI VCS, very good condition, complete with five cartridges, including Space Invaders, and Chess, £120.00. Tel: Lodgehill 47164.

SWAP ZX81 Adventures Sinclair Cassin Adventure and Pison Saucers Island for other ZX81 or VIC adventures. Tel: 0202 682974 (after 7 pm).

DRAGON 32, perfect condition, including cassette, lead, game cassette, manuals, £180. Tel: 01-455 2712 (eves).

ACETRONIC VIDEO GAMES CENTRE, with Space Invaders, Olympics and Grand Prix cartridges. All leads. Very good condition. £55. Tel: Horn-dean (0705) 593630.

SHARP MZ80K, excellent condition, green screen, dust cover, re-set switch, 4 MHz up grade, 5 types of Basic, over £500 of software. £350. Tel: 09285 76867.

VIDEO GENIE, with 16K win sound cover, £300 worth of software, £50 worth of books under one year old, excellent condition, with manuals and box worth £600 — asking only £300. Tel: Potters Bar 53596.

ATARI VCS plus Video Olympics, Combat, Outlaw, Slot Races, Space Invaders, Air-Sea Battle, Basic programming plus keyboard, paddle, and joystick controls. £135. Tel: 0443 206956.

TANGERINE MICRON in system rack for sale, including Motherboard PSU fan, tool kit and software. £240. Tel: 01-801 8108 (Bill Walker).

ATARI VIDEO COMPUTER, with Space Invaders, Missile Command, Asteroids, Outlaw Combat, joystick and paddle controllers, swap for 16K Video Game or TR580 16K Level II. Tel: 051-639 8779 (evenings).

VIC20 CASSETTE DECK, books, software, £150.00. 9 Cresswell Terrace (Top Flat), Sunderland SR2 7ER (Mr W. C. Chan).

ATARI VCS with seven cartridges, Dodgem, Space Invaders, Asteroids, Street Racer, Combat, Air Sea Battle and Night Driver. £130.00. Tel: Basildon 553963 (David Edwards).

ATARI VCS with five cartridges (Combat, Basketball, Outlaw, Missile Command and Asteroids), excellent condition, fully boxed, as new, £105. Tel: 0703 766562 after 5 pm.

Wanted

WANTED, VIC20 or similar micro-computer in exchange for a realistic OX200 communications receiver. Tel: 051-424 1572. Mr. Briscoe.

WANTED ZX SPECTRUMS, 16 or 48K, good prices paid. Tel: 07356 5038, Richard.

UK101 WANTED, Must be less than £100. Telephone Boston 64443 evenings only.

BACK NUMBERS WANTED! £1 each for 2, 6, 7, 11, 12. Phone Douglas Austin, 0732 843833 (daytime).

WANTED: 16K RAMPAC, in good order, for ZX81. Contact John Radcliffe, Leatherhead 373370 (evenings).

WANTED: BBC MICRO MODEL B, possibly compatible cassette and television. Under £500. The lot Somerset. Tel: (0458) 42389 after 8 pm.

WANTED Kick Keyboard and ZX81 or Amber Printer. Dave. Tel: 01-680 9697.

WANTED, Dragon 32, Tel. Biggles-wade (0767) 312970. J. Tasker after 5 pm.

WANTED 16K ZX81, with or without software. £50.00.00. Tel: 0249 812038 (after 11 pm). L. Del Pozo (Wiltshire).

WANTED: ATARI DISK DRIVE, preferably Tel: 01-571 1309, after 7 pm.

POPULAR
Computing
WEEKLY

BACK NUMBERS

MAKE SURE OF A
REAL COLLECTORS' ITEM —
THE FULL SET OF PCW

We will mail any of the numbers you're missing from Issue 1 to the latest — for just 50p an issue, including p & p.

(We have no more copies of Issues 2, 6, 7 or 11)

Send cheques/Postal Orders to:

Back Numbers
Popular Computing Weekly
Hobhouse Court
19 Whitcomb Street
London
WC2 7HF

THE WORKING SPECTRUM

A LIBRARY OF PRACTICAL SUBROUTINES AND PROGRAMS

By David Lawrence

ONLY £5.95 inc p&p

Fed up with books full of trivia, simple games programs and notes which assume you have all the time in the world to experiment.

This book is different. It is based on a collection of solid, sophisticated programs in areas such as data storage, finance, calculation, graphics, household management and education.

Each of the programs is explained in detail, line by line. And each of the programs is built up out of general purpose subroutines and modules which, once understood, can form the basis of any other programs you need to write.

Advanced programming techniques spring out of the discussions explaining each subroutine. The result is not only to advance your programming skills but also to leave you with a wide range of practical applications programs which might otherwise only be available to those prepared to buy cassettes or those capable of writing substantial programs for themselves.

The Working Spectrum is published by Sunshine Books, in association with Popular Computing Weekly.

THE WORKING SPECTRUM

A LIBRARY OF PRACTICAL SUBROUTINES AND PROGRAMS



DAVID LAWRENCE

Please send me a copy of The Working Spectrum.

I enclose a cheque/postal order for £5.95.

Name

Address

Signed

Please make your cheques payable to Sunshine Books.

Please send your order to The Working Spectrum, Sunshine Books, Hobhouse Court, 19 Whitcomb Street, London WC2 7HF.

Please allow 28 days for delivery.

COMPUTER SWAP 01-930 3266

Do you want to buy or sell a microcomputer? You can do it FREE in Computer Swap, a new regular service for *Popular Computing Weekly* readers.

All you have to do is phone Computer Swap on 01-930 3266 and give us details of your computer, the price you want for it, your name, address and telephone number.

Computer Swap entries are limited to a maximum of 30 words. They will be published in the first available issue.

POPULAR Computing WEEKLY

CLASSIFIED ADVERTISING

Computer Swap — Free/Private reader — 10p a word/Trade Advertisement — 20p a word/Semi-display — £5 a single column centimetre, minimum two-column centimetres.

Computer Swap — buy or sell your computer for free through Computer Swap. See box on left for details.

Private readers — other advertisements from private readers cost 10p a word.

Trade advertisements — cost 20p a word.

Semi-display — why not make your advertisement more substantial by choosing the semi-display rate. It is only £5 a single column centimetre.

Send your classified entries to Classified Department, *Popular Computing Weekly*, Hobhouse Court, 19 Whitcomb Street, London WC2. For semi-display enquiries call Alastair Macintosh on 01-930 3840.

Here's my classified ad.

Please continue on a separate sheet of paper

I make this words, at per word so I owe you £.....

Name

Address

Telephone

ROMIK SOFTWARE

24 Church Street, Slough SL1 1PT. Telephone: Slough (STD 0753) 71535



**ROMIK PROMISE
A MINIMUM OF
ONE NEW GAME
EVERY MONTH**

Britain's leading games software house are proud to announce our new range of exciting games and other software for the Vic20. (Games for BBC, Dragon, Spectrum and Atari available soon.)

**ALL ACTION GAMES CARRY A FREE ENTRY TO NATIONWIDE COMPETITIONS WITH FANTASTIC PRIZES
ALL PROGRAMS ARE £9.99**

MARTIAN RAIDER

For unexpanded Vic20

Skim as close as you dare to the surface of the planet, devastating the Martian cities, destroying ammunition dumps (gaining more time), shooting down the ground-to-air missiles and UFOs, dodging or blasting the meteorites.




"A real action shot of the game"

AIR-SEA ATTACK

For expanded Vic20

You can use 3K or 16K RAM


Can you plot a modern jet fighter? Take off from your aircraft carrier and engage enemy aircraft in battle. Shoot them down and then drop your bombs on the enemy aircraft carrier. Watch out — the enemy fighter is trying to do the same! If he gets past your air defence you are left to defend your own carrier with sea-air missiles. You each have three jets.



SHARK ATTACK

For unexpanded Vic20

You are in shark-infested waters after being thrown overboard from a pirate ship. Your only protection being an atomic net which you trail behind you, trying to cover all the visible ocean and ensnare the sharks at the same time. Beware of stopping or covering your tracks for too long, if you do, then the sharks will escape and come after you. Watch out for the ever increasing deadly octopi (sometimes the sharks will eat part or all of one!)



"A real action shot of the game"

MIND TWISTERS

For unexpanded Vic20

Four games to stretch your brain

Blackjack, Decoder, Four Thought and Teaser are our computerised versions of very popular home games and will test your mental agility and skill for many a long hour.

BLACKJACK

You start with £1,000, the objective being to break the bank, to do this you have to win (including your starting money) £20,000.

Instructions. You have to score nearer (but not over) 21, than the computer does. The computer deals your first card, you then place your bet and hit the return key, the computer then deals your second card. If you want another card hit the "C" key, if not hit the "S" key.

Points. Ace 1 or 11, Jack, Queen, King 10. Scoring 21 points with 2 cards — you automatically win. Scoring 21 points or less with 5 cards — you automatically win.

Draw — the computer wins. Your kitty is automatically adjusted win or lose. If you lose all your kitty — game over.

DECIPHER

You have to guess what combination of colours the computer has selected — to enter a colour just hit the colour button on the computer, when you have entered your five choices of colour, the computer will display (a) nothing at all — none right; (b) Black or white squares or both — for every black square you will have a correct colour in the correct position, for every white square you will have a correct colour in the wrong position. If you cannot find the complete combination, it will be displayed when you have had twelve attempts.

FOUR THOUGHT

You have to make a line of four squares — horizontally, vertically or diagonally BEFORE the computer does, taking turns to take a square (squares can only be placed at the bottom of the grid or on top of another square). **Keys.** Hit the number key of the column you want your square dropped in, then hit the return key.

TEASER

The aim of the game is to score "15" BEFORE the computer does, using any combination of three boxes, if you cannot score "15" then you must try and stop the computer from doing so and force a draw. **Keys.** Hit the number key of the box that you want (you can only select an empty box).

MULTISOUND SYNTHESIZER

For the unexpanded Vic20

The Vic Multisound Synthesizer is very flexible and can be played in more ways than can ever be explained here, to create music and special effects. For example, create any tune, up to 255 notes (after following appropriate instructions), then press "F1" or "F3", then key "G" and enjoy the added effect. Now hit "+", listen to the difference. For a surprise — hit "—". Now add a melody over the top — hit key "8" then "T" — now play a melody, or experiment. Have fun!

NEW NEW NEW
MOONS OF JUPITER
For expanded Vic20, 3K, 6K or 16K

SEA INVASION

For the unexpanded Vic20

Fight off the attacking sea creatures for as long as you can. Shoot the whale for a surprise score, watch out for the crabs, starfish and octopi.

You are a commander of a fleet of destroyers. Looking on from the safety of Mother Ship, you send in one destroyer at a time to blast a passage through the

MOONS OF JUPITER

Your destroyers have to dodge and blast the UFOs... Watch out for the Gologs, they can smash your destroyers, but you cannot harm them.

MACHINE CODE
ARCADE QUALITY GAME

SPACE ATTACK is a game of skill. You as the pilot of an intergalactic battleship have to fight your way through wave after wave of various alien spaceships.

MACHINE CODE
ARCADE QUALITY GAME

NEW NEW NEW
SPACE ATTACK
For the unexpanded Vic20

OUR GAMES ARE AVAILABLE FROM ALL GOOD HOME COMPUTER SHOPS, INCLUDING:

Melbourn, 82 Victoria Street, London SW1. 01-828 2511. . . Melbourn, 137 The Strand, London WC2. 01-240 2321. . . Melbourn, 177 London Road, Croydon. 01-885 8626. . . All branches of Ladbroke, Vic Centre, 154 Victoria Road, Acton W3. 01-992 9904. . . A. G. Systems, Exeter. . . Microtrading, Birmingham. . . Supersoft, Harrow. . . Ailing Computers, Harley, Surrey. 348833. . . Ovario Computers, Harrow. 429 1088. . . Cavendish Data Systems, South Norwood. 656 8941. . . Software Master, 30 Lincoln Road, Birmingham. . . Tomorrow's World, Dublin. . . Algrey Software, Barnsley. 83189. . . Computer & Business Systems, Nelson, Lancs. 0292 501191. . . Dyad Developments, Oxon. 08446 729. . . Latentronics/Blackpool Computer Stores. 0253 27691. . . Carlow Radio Ltd., Bedford. 06447. . . Byte Shop Computerland, Glasgow. 221 7409; Nottingham 40576; Manchester 236 4737. . . First Byte Computers, Mole Centre, Derby. 365280. . . Simmonds Mapoe Computers Ltd., Trichinankam. 691 4477. . . Capital Computer Systems, Ilford 553 3628. . . A. D. M. Business Systems, L.V.E. Building, Leicester 548922. . . John Ltd., Bridge, Near Canterbury, Kent. 0227 800883. . . Twickenham Computer Centre. 01-892 7998. . . Kool Microcomputers, Maidstone 0622 52784. . . J. S. Simmet Computers Ltd., The Computer Shop, Kingston. 01-544 3783. . . Chris Denning Ltd., Poole. 0202 781558. . . Yorkshire Micro Computers, Scarborough, Yorks. 0723 781356. Taylor Wilson Systems, Oakfield House, Station Road, Dorrington.

ONE FULL-TIME FULLY EXPERIENCED MACHINE CODE PROGRAMMER WANTED URGENTLY

SPECTRUM COMES TO LIFE !

ABBEX


THE GAMES PEOPLE

SPOOKYMAN



EAT THE PILLS AND KEEP AWAY FROM THE GHOSTS. EAT THE VITAMINS AND CHASE THE GHOSTS. FULL MACHINE CODE ARCADE ACTION AND SOUND. DESIGNED TO MAKE YOUR ADRENALIN RUN HIGH. **PRICE £4.95**

COSMOS



YOU HAVE THE JOB OF PROTECTING A CONVOY FROM ALIENS AND METEOR STORMS. WATCH OUT FOR THE SPACE MINES AS YOU PLAY THIS AMAZING MACHINE CODE ARCADE ACTION SIMULATION PROGRAM. **PRICE £4.95**

WRITE OR PHONE FOR LIST OF GAMES FOR OTHER COMPUTERS OR JUST MORE GAMES

ABBEX ELECTRONICS LTD

20 ASHLEY COURT, GREAT NORTHWAY, LONDON NW 4
Tel: 01-203 1485

PLEASE COMPLETE IN BLOCK CAPS

NAME (Mr/Mrs/Miss)

ADDRESS

(CARD HOLDERS)

POST CODE PHONE NO.

Make cheques payable to ABBEX
I enclose my cheque for £

I wish to pay by ☐ CHEQUE ☐ VISA ☐ ACCESS ☐

Please debit my creditcard a/c

NUMBER ☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐

Signed

date

Please send me the following
(Allow 14 days for delivery)

POST BY DEC 8th and receive your order in time for Christmas

☐ **SPOOKYMAN**
PRICE £4.95

☐ **COSMOS**
PRICE £4.95

